


CO₂Tab V1.0 User's Guide

THERMODYNAMIC AND TRANSPORT PROPERTIES OF CARBON DIOXIDE

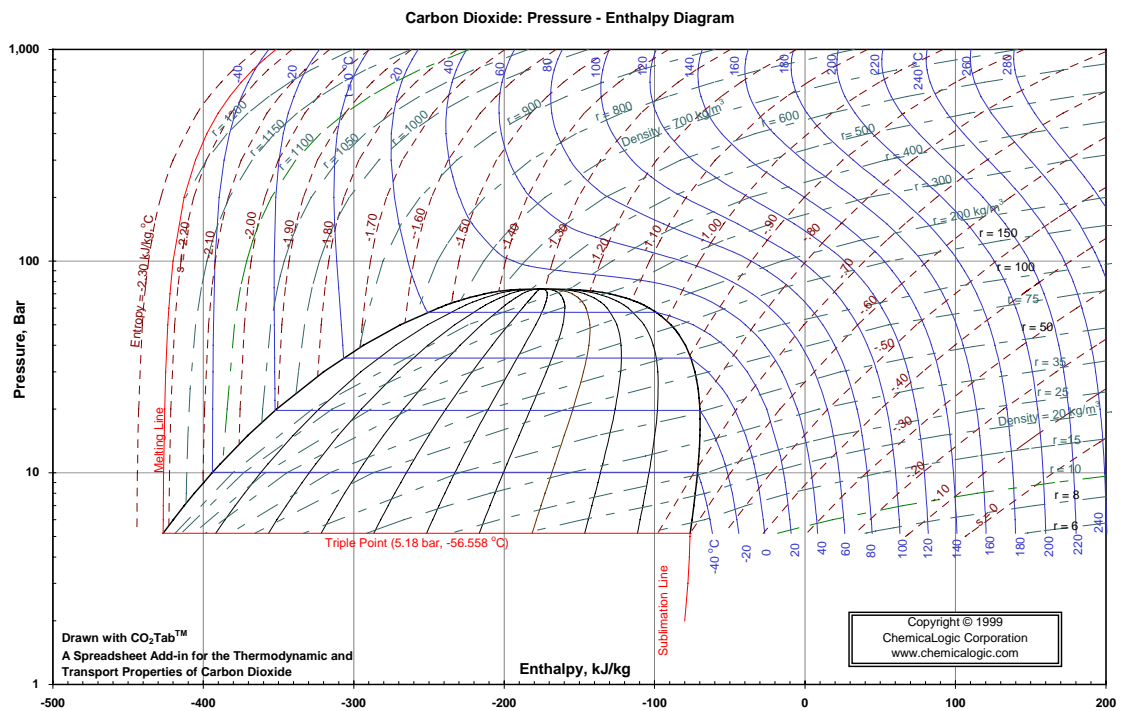

CHEMICALLOGIC

Software License Agreement

NOTICE: THIS IS A CONTRACT. BY INSTALLING AND USING THE SOFTWARE INDICATED BELOW, YOU ARE IMPLICITLY ACCEPTING ALL THE TERMS AND CONDITIONS OF THIS AGREEMENT.

CO₂Tab™ Thermodynamic and Transport Properties of Carbon Dioxide

This ChemicalLogic Corporation ("ChemicalLogic") License Agreement accompanies the software product identified above and related documentation (SOFTWARE). The term SOFTWARE shall also include any upgrades, modified versions or updates of the SOFTWARE licensed to you by ChemicalLogic. You must read this Agreement carefully before indicating acceptance at the end of the text of this Agreement. If you do not agree with the terms and conditions of this Agreement, decline where instructed during installation, and you will not be able to use the SOFTWARE. ChemicalLogic grants to you a nonexclusive license to use the SOFTWARE, provided that you agree to the following:

USE You (an entity or a person) may use the SOFTWARE either on a stand-alone computer or on a network if you meet the following conditions.

STAND-ALONE COMPUTER USE You must acquire one copy of the SOFTWARE for each computer on which the SOFTWARE will be installed. The primary user of the computer may also use the SOFTWARE on a home and/or laptop computer, provided the SOFTWARE is used on only one computer at a time.

SHARED NETWORK USE You may use the SOFTWARE on a network provided you have purchased SOFTWARE equal to the maximum number of copies in use at any time. The SOFTWARE is "in use" on a computer when it is resident in memory or when executable and other files are installed on the hard drive or other storage device. Software which is stored on a server and not resident in memory on that machine is not considered "in use".

UPGRADES If the SOFTWARE is an upgrade, you are authorized to use the SOFTWARE only if you are an authorized user of a qualifying product as determined by ChemicalLogic. The upgrade SOFTWARE replaces the qualifying product.

RESTRICTIONS You may not alter, reverse engineer, decompile, or disassemble the SOFTWARE. You may not loan, rent, lease, or license the SOFTWARE or any copy. However, you may transfer the SOFTWARE on a permanent basis provided you transfer the SOFTWARE including the most recent update and all prior versions, this SOFTWARE Agreement, and all documentation and media, and you do not retain any copies.

COPYRIGHT The SOFTWARE is owned by ChemicalLogic Corporation, and its structure, organization and code are the valuable trade secrets of ChemicalLogic. The SOFTWARE is also protected by United States Copyright Law and International Treaty provisions. You agree not to modify, adapt, translate, reverse engineer, decompile, disassemble or otherwise attempt to discover the source code of the SOFTWARE. You may use trademarks only to identify printed output produced by the SOFTWARE, in accordance with accepted trademark practice, including identification of trademark owner's name. Such use of any trademark does not give you any rights of ownership in that trademark. Except as stated above, this Agreement does not grant you any intellectual property rights in the SOFTWARE.

TRANSFER You may not rent, lease, or sub-license the SOFTWARE. You may, however, transfer all your rights to use the SOFTWARE to another person or entity, provided that you transfer this Agreement with the SOFTWARE.

LIMITED WARRANTY For ninety (90) days from your date of purchase, ChemicalLogic warrants that the magnetic media and the user documentation (if any) are free from defects in material and workmanship. ChemicalLogic will, at its option, either refund the amount you paid or provide you with corrected items at no charge provided that the defective item(s) is (are) returned to ChemicalLogic within ninety (90) days from the date of purchase. Except as specifically provided herein, ChemicalLogic makes no warranty, representation, promise, or guarantee, either express or implied, statutory or otherwise, with respect to the SOFTWARE, including but not limited to implied warranties of merchantability, fitness for a particular purpose and noninfringement. ChemicalLogic is not responsible for, and does not make any representation, warranty, or condition concerning product, media, software, or documentation not manufactured or supplied by ChemicalLogic, such as third parties' programs that are designed to use or include the SOFTWARE.

LIMITATION OF LIABILITY Because software is inherently complex and may not be completely free of errors, you are advised to verify your work and to make backup copies. In no event will ChemicalLogic be liable for any damages whatsoever (including, without limitation, damages for loss of business profits, business interruption, loss of business information, or other pecuniary loss) arising out of the use of or inability to use the software, user documentation, or related technical support, even if ChemicalLogic has been advised of the possibility of such damages. In no case shall ChemicalLogic' liability exceed the amount paid by you for the SOFTWARE. Because some states do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation may not apply to you.

GOVERNING LAW AND GENERAL PROVISIONS This Agreement will be governed by the laws of the Commonwealth of Massachusetts U.S.A., excluding the application of its conflicts of law rules. This Agreement will not be governed by the United Nations Convention on Contracts for the International Sale of Goods, the application of which is expressly excluded. If any part of this Agreement is found void and unenforceable, it will not affect the validity of the balance of the Agreement, which shall remain valid and enforceable according to its terms. You agree that the SOFTWARE will not be shipped, transferred or exported into any country or used in any manner prohibited by the United States Export Administration Act or any other export laws, restrictions or regulations. This Agreement shall automatically terminate upon failure by you to comply with its terms. This Agreement may only be modified in writing signed by an authorized officer of ChemicalLogic Corporation.

U.S. GOVERNMENT RESTRICTED RIGHTS The SOFTWARE and/or user documentation are provided with RESTRICTED AND LIMITED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of The Rights in Technical Data and Computer SOFTWARE clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer SOFTWARE - Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer/contractor is ChemicalLogic Corporation, 8 Cedar Street Suite 56, Woburn MA 01801, USA.

CO₂Tab™ is Copyright © 1999 by ChemicalLogic Corporation.
CO₂Tab™ is a trademark of ChemicalLogic Corporation.
ChemicalLogic® is a registered trademark of ChemicalLogic Corporation.
All other trademarks and copyrights are hereby acknowledged.

Table of Contents



INTRODUCTION TO CO₂TAB	1
OVERVIEW AND FEATURES	1
TECHNICAL SUPPORT AND CONTACT INFORMATION	3
GETTING STARTED	5
MINIMUM SYSTEM REQUIREMENTS	5
INSTALLATION	5
<i>Quick Installation of CO₂Tab</i>	6
<i>Manual Installation of CO₂Tab for Excel 97/2000</i>	6
USING CO ₂ TAB	7
<i>Where is CO₂Tab?</i>	7
<i>Setting CO₂Tab Property Options</i>	9
<i>Using the Saturated Properties Dialog Box</i>	10
<i>Using the Superheated/Subcooled Properties Dialog Box</i>	11
<i>Using the Constant Properties Dialog Box</i>	13
<i>Using the Melting/Sublimation Dialog Box</i>	14
<i>Using the Solubility in Water Dialog Box</i>	15
FUNCTION REFERENCE	17
OVERVIEW	17
FUNCTIONS FOR SATURATED PROPERTIES	21
<i>CDPSAT</i>	21
<i>CDTSAT</i>	22
FUNCTIONS FOR SUPERHEATED OR SUBCOOLED PROPERTIES	22
<i>General Description</i>	23
FUNCTIONS FOR CONSTANT PROPERTIES	24
MELTING AND SUBLIMATION LINE FUNCTIONS	25
<i>General Description</i>	25
FUNCTIONS FOR SOLUBILITY IN WATER.....	26
<i>Range</i>	26
<i>CDSOLU</i>	26
<i>CDSOLUPP</i>	27

List of Tables

TABLE 1: LIST OF FILES IN CO ₂ TAB FOR EXCEL 97/2000 DISK	6
TABLE 2: OVERVIEW OF CO ₂ TAB FUNCTIONS	18
TABLE 3: PROPERTY CODES FOR THERMODYNAMIC AND TRANSPORT PROPERTIES	20
TABLE 4: SOLUBILITY PROPERTY CODES.....	26

List of Figures

FIGURE 1: ACCESS TO CO ₂ TAB IN EXCEL	8
FIGURE 2: CARBON DIOXIDE PROPERTY OPTIONS DIALOG.....	10
FIGURE 3: SATURATED PROPERTIES DIALOG	11
FIGURE 4: SUPERHEATED/SUBCOOLED DIALOG BOX	13
FIGURE 5: CONSTANT PROPERTY DIALOG BOX.....	14
FIGURE 6: MELTING/SUBLIMATION PROPERTY DIALOG BOX.....	15
FIGURE 6: SOLUBILITY IN WATER PROPERTY DIALOG BOX	16

Introduction to CO₂Tab


Heredity is a strong factor, even in architecture. Necessity first mothered invention.

Now invention has little ones of her own, and they look just like grandma.

– E. B. White (1899–1985), U.S. author, editor.

“The Old and the New,” in *New Yorker* (19 June 1937; repr. in *Writings from the New Yorker 1927–1976*, ed. by Rebecca M. Dale, 1991).

Overview and Features



CO₂Tab is an important productivity tool for those who are engaged in the ever widening variety of applications of carbon dioxide such as: closed-loop refrigeration, frozen food processing, food preservation and storage, beverage carbonation, brewery operations, supercritical fluid extraction, precision cleaning with carbon dioxide, pipeline engineering, secondary oil recovery, slurry transport, inserting, gas processing, CO₂ scrubbing, or research activities for effective CO₂ sequestration methods to control the green-house gases.

CO₂Tab, designed as an add-in package to popular spreadsheet applications, allows users the convenient access, without leaving the spreadsheet computation environment, to a variety of property values. CO₂Tab contains a comprehensive set of thermodynamic and transport properties applicable over a wide range of conditions, with selected derivative and dimensionless properties.

CO₂Tab also includes functions for obtaining the temperature or pressure along the sublimation line and the melting line. CO₂Tab also allows the calculation of the solubility of CO₂ in water, which is an important parameter in atmospheric chemistry, the beverage industry, etc.

CO₂Tab uses fundamental equations to calculate all properties with no interpolation or curve fits to raw data. CO₂Tab uses the international standard formulation for the thermodynamic and transport properties of carbon dioxide. The references used in CO₂Tab are:

Reference

A New Equation of State for Carbon Dioxide Covering the Fluid Region from the Triple Point Temperature to 1100 K at Pressures up to 800 MPa, R. Span and W. Wagner, J. Phys. Chem. Ref. Data, Vol. 25, No. 6, 1996.

The Solubility of Carbon Dioxide in Water at Low Pressure, John J. Carroll, John D. Slupsky, Alan E. Mather, J. Phys. Chem. Ref. Data, Vol. 20, No. 6, 1991

CO₂Tab functions have a wide range of applicability. Generally, the properties returned by these functions are acceptable within the following ranges:

- Pressure (P , bar): $0 \leq P \leq 8,000$
- Temperature (T , °C): $-73.15 \leq T \leq 826.85$

The CO₂Tab add-in package is based on a set of 29 core functions that together calculate over 40 thermodynamic and transport properties of carbon dioxide. You can use these functions directly in your spreadsheet or you can use CO₂Tab's easy-to-use dialog boxes to automatically generate the appropriate function call with the correct arguments.

CO₂Tab functions are divided into the following categories:

- 1.** Functions for saturated vapor, liquid or two-phase properties
(2 functions)
- 2.** Functions for superheated vapor or subcooled liquid properties
(9 functions)
- 3.** Melting and Sublimation Line Functions
(4 functions)
- 4.** Solubility in Water
(2 functions)
- 5.** Functions for constant carbon dioxide properties
(12 functions)

Technical Support and Contact Information



ChemicaLogic offers free technical support with the purchase of CO₂Tab. If you have any problems during installation or use of CO₂Tab, please contact us at one of the addresses listed below.

Before requesting support, it would save both your time and our time if you could first do the following:

- Make sure you have read any relevant portions of the manual
- Isolate the problem to a small test case
- Have the version number of your copy of CO₂Tab ready
- Have the version number of the spreadsheet application and the operating system on which it is installed ready

You can contact us via any of the following paths:

By Telephone: 781.938.1151 (9 AM to 5 PM, EST)

By Fax: 781.938.7722 (24 hours a day)

By Email: clc.support@chemicallogic.com

By Web: <http://www.chemicallogic.com>

By Mail: ChemicalLogic Corporation
8 Cedar Street, Suite 56
Woburn, Massachusetts 01801-6362
USA

Getting Started

*Idiot box, n:
The part of the envelope that tells a person where to place the stamp
when they can't figure it out for themselves.
– Rich Hall, “Sniglets”.*

Minimum System Requirements



You should not encounter any hardware or software problems in using CO₂Tab on any hardware that has one of the following spreadsheet applications pre-installed:

- Microsoft Excel 97/2000 for Windows 95/98/NT4

CO₂Tab requires about 1,400 kilobytes (1.4 MB) of hard disk space. While CO₂Tab will work with 8 to 16 MB of RAM it is recommended that at least 32 MB of RAM be available.

Installation



CO₂Tab contains an automatic installation program written in the spreadsheet application itself. It is recommended that you use this program to install CO₂Tab on your machine.

Note

Before installing CO₂Tab on your machine, it is a good idea to create a backup copy of the distribution diskette.

The following sections describe how to install CO₂Tab.



Quick Installation of CO₂Tab

Perform the following steps to automatically install CO₂Tab on your machine:

1. Start Excel
2. Close any open workbooks that you may have automatically loaded.
3. Insert the CO₂Tab disk in the 3½ inch drive
4. From within Excel open the file INSTALL.XLS located on the CO₂Tab diskette
5. Follow the instructions on the screen
6. After a successful installation, the installation file INSTALL.XLS will automatically close itself.
7. Close your spreadsheet application and restart it to activate CO₂Tab. Now every time you start your spreadsheet application, CO₂Tab will be automatically loaded.

If you did not encounter any installation problems, you can skip the following sections and go directly to section labeled Using CO₂Tab on page 7.



Manual Installation of CO₂Tab for Excel 97/2000

For manual installation, carefully read the rest of this section as well as the instructions contained in the file README.TXT located on the CO₂Tab diskette. The CO₂Tab for Excel 97/2000 diskette contains the following files:

Table 1: List of Files in CO₂Tab for Excel 97/2000 Disk

Filename	Description
Install.xls	Installation file (Excel file)
Readme.txt	Read me file (text file)
mollier_chart_eng.xls	Mollier chart in English Units
mollier_chart_met.xls	Mollier chart in Metric Units
phase_diagram.xls	CO ₂ Phase diagram
CO2Tab32.dll	CO ₂ Tab system file
CO2Tab.cnt	CO ₂ Tab help contents file
CO2Tab.hlp	CO ₂ Tab help file
CO2Tab.xla	CO ₂ Tab add-in (Excel add-in file)

To manually install CO₂Tab on your machine, follow these steps:

1. Insert the CO₂Tab disk in the 3½ inch drive
2. Copy the CO₂Tab system files CO2TAB32.DLL into the Windows system directory (e.g. C:\WINDOWS\SYSTEM)

3. Copy the CO₂Tab add-in file: CO2TAB.XLA into the Excel library directory (e.g. C:\EXCEL\LIBRARY)
4. Copy the CO₂Tab help files: CO2TAB.CNT and CO2TAB.HLP into the Excel directory (e.g. C:\EXCEL).
5. Start Excel
6. From the Tools menu select Add-ins...
7. Scroll down the list-box and locate the CO₂Tab add-in.
8. Make sure that the check-box in front of CO₂Tab is checked and close the add-in dialog box.

This completes the manual installation of CO₂Tab for Excel 97/2000 on your machine.

Using CO₂Tab



The following sections describe how to access and use the various features of CO₂Tab.


Where is CO₂Tab?

As an add-in package to your spreadsheet application, CO₂Tab quietly becomes a part of your spreadsheet. You only see it when you need to use it. Just to make sure that CO₂Tab is available,

1. Start your spreadsheet application (if you have not already started it)
2. Click on the Tools menu. You should see a CO₂Tab pop-up menu somewhere near the bottom of the Tools menu
3. Expand the CO₂Tab pop-up menu by clicking on it
4. The following figure show what you should see
5. You can also access CO₂Tab from the ChemicalLogic toolbar (shown in the figure)

A pop-up menu (which is also known as a drop-down menu) is a special menu item that displays a sublist of menu items when it is selected.

Figure 1: Access to CO₂Tab in Excel

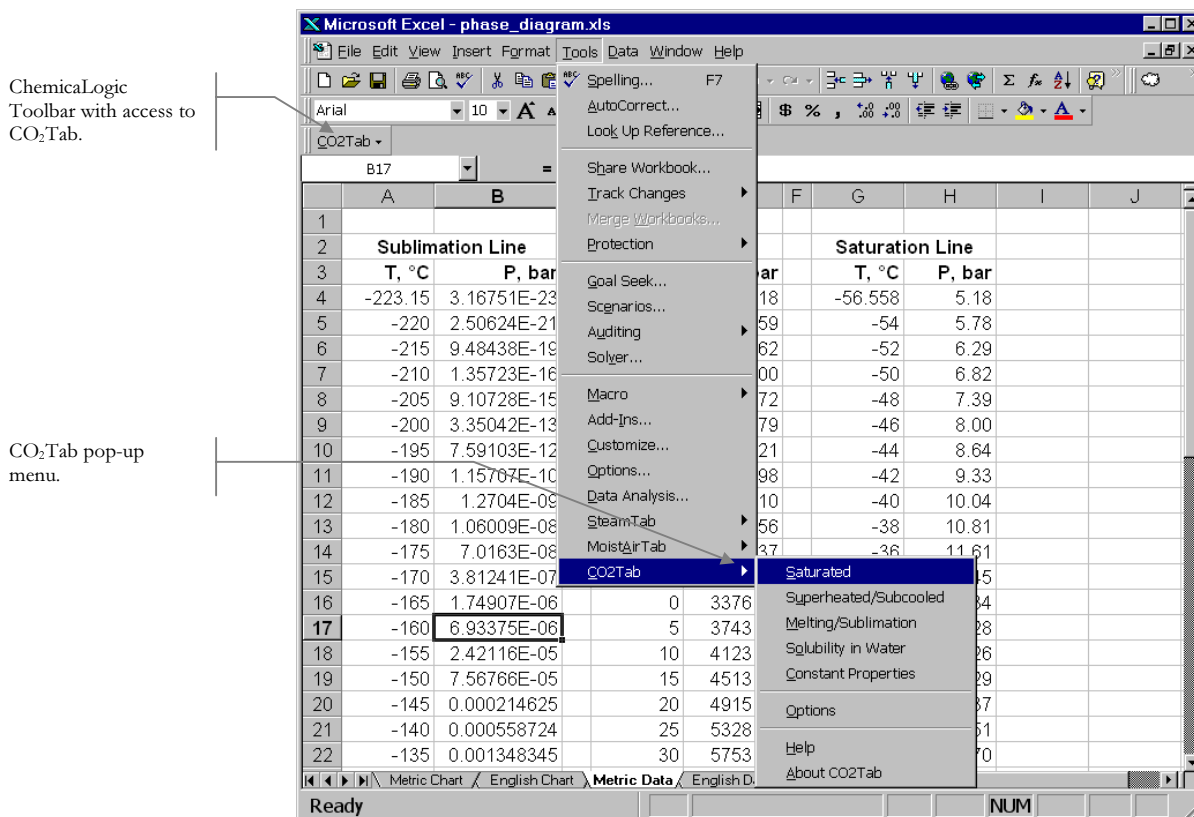

The CO₂Tab pop-up menu contains the following menu items:

1. Saturated

Selecting this menu item brings up the saturated properties dialog box which helps you obtain saturated vapor or liquid properties, or two-phase properties.

2. Superheated/Subcooled

The menu item displays the dialog box for obtaining supercritical or subcooled properties. This dialog box is also used for constant property processes, such as, isenthalpic, isentropic, constant volume, etc. CO₂Tab uses a highly efficient iterative search algorithm to quickly calculate all constant-process properties.

3. Melting/Sublimation

This menu item allows you to obtain the melting and sublimation temperature or pressure.

4. Solubility in Water

This menu item bring up a dialog-box that allows you to calculate the solubility of carbon dioxide in water.

5. Constant Properties

Selecting this menu item brings up the constant properties dialog box which you can use to select the required constant property.

6. Options

This menu item allows you to select the units and other configuration options. You can also change the units and interface settings from any of the CO₂Tab dialog-boxes.

7. Help

Provides you with easy access to online help.

8. About CO₂Tab

Gives you information regarding the version of CO₂Tab installed on your machine.

The following sections describe how to use the various capabilities of CO₂Tab.

Setting CO₂Tab Property Options

The options dialog box helps you in setting up the units to base your property calculations. All of the CO₂Tab dialog-boxes use the same options that you specify from the option dialog box.

You can access the CO₂Tab options from either the CO₂Tab pop-up menu or from any of the other CO₂Tab dialog boxes.

Use the following steps to set the CO₂Tab options (see **Figure 2** for an illustration of the CO₂Tab options dialog box):

1. Select units

Select the Metric radio button if you want properties in Metric/SI units or select the English radio button for properties English units.

2. Select comment option

Check the comment box if you want CO₂Tab to place a comment regarding the property calculated and the units in the output cell.

3. Click OK

Click on the OK button to accept the changes. After you have clicked OK, all of the CO₂Tab dialog-boxes will use the specified units options.

If you are using the Worksheet functions directly in your spreadsheet, then you do not have to set the options. The options dialog is only used by the CO₂Tab dialog boxes.

See Table 2 on page 20 for a listing of carbon dioxide properties and their Metric/SI and English units


Note

If you typically work with only one set of units, you need to only specify them once. CO₂Tab will remember the options in subsequent sessions.

Figure 2: Carbon dioxide Property Options Dialog

Use this group to select the units.

Selecting this option places a note text (or comment text) in the specified output cell showing the name and units of the property calculated. Excel users can view this note by hovering the mouse over this cell.

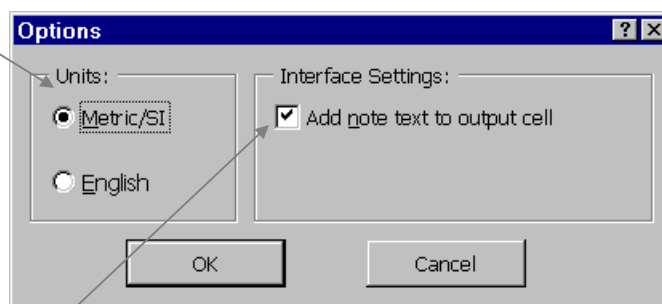

Using the Saturated Properties Dialog Box

The saturated properties dialog box helps you in calculating saturated vapor or liquid carbon dioxide properties at either specified temperature or specified pressure.

See the Chapter: Function Reference on page 17 for a description of CO₂Tab functions

This dialog box automatically creates a call (with all the correct arguments) to the appropriate CO₂Tab function based on the input parameters you supply.

Use the following steps to calculate a saturated carbon dioxide property (see **Figure 3** for an illustration of the saturated carbon dioxide properties dialog box):

1. Select Options (Optional)

Click on the Options button to bring up the options dialog-box from where you can select the units, as described in the previous section. If you previously selected the units, you can skip this step.

2. Select independent variable

Choose either Temperature or Pressure as the independent variable (the variable you wish to specify) by clicking on the appropriate radio button.

3. Provide a value for the independent variable

Type in a number for the independent variable in the Value edit box. Alternatively, you can type in or select a cell reference that contains a value for the specified independent variable.

4. Select phase

Select either Vapor or Liquid for saturated properties. For two-phase properties, select Quality and specify the carbon dioxide quality as a value between 0 and 1.

5. Select carbon dioxide property required

Using the drop-down combo-box, select the property you want. Use the mouse or the cursor keys to scroll through the list of available carbon dioxide properties until you come to the one you desire.

Depending on your choice of units and independent variable, the value text will show you the units in which the value is required

Tip: Click on a cell where you want the results before opening the saturated dialog box. CO₂Tab will automatically fill in the Output cell reference

6. Provide an output cell reference

Notice that CO₂Tab has already filled this in with the currently selected cell reference. If this is not where you want the results to go, select or type in a different cell reference.

7. Click OK

CO₂Tab will calculate the requested carbon dioxide property and place it in the specified output cell as a **formula**.

You can determine the triple point and the critical point of carbon dioxide by using the Constant carbon dioxide properties dialog box. See page 13.

If you activate the saturated dialog box on a cell that already contains a saturated CO₂Tab function, then CO₂Tab will automatically initialize the dialog box with the correct values.

Note


The specified independent variable must be greater or equal to the triple point and less than or equal to the critical point of carbon dioxide. If the specified independent variable is outside these bounds, the CO₂Tab function returns the #VALUE! error.

If you want a different saturated property, simply repeat the above steps. Alternatively, you could copy the cell containing the saturated property function and paste it in the location you want. You can then use the saturated dialog box to change the output carbon dioxide property.

Figure 3: Saturated Properties Dialog

Click on this check box if you want to point to a cell containing a value for the independent variable

Click here to drop down the list box and to select the desired output carbon dioxide property

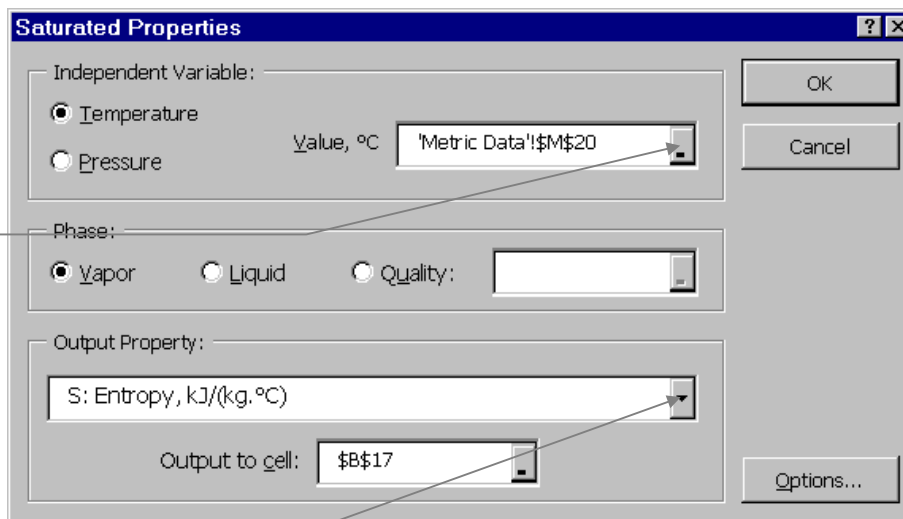

Using the Superheated/Subcooled Properties Dialog Box

The superheated/subcooled dialog box helps you in calculating supercritical or subcooled properties. You also use this dialog box to model constant property processes, such as, isenthalpic, isentropic, constant volume, etc.

See the Chapter: Function Reference on page 17 for a description of CO₂Tab functions

Using this dialog box automatically creates a call to the appropriate CO₂Tab function based on the input parameters you supply.

The following steps show you how to use this dialog box (see **Figure 4** for an illustration of the superheated/subcooled dialog box):

1. Select Options (Optional)

Click on the Options button to bring up the options dialog-box from where you can select the units, as described in the previous section. If you previously selected the units, you can skip this step.

2. Select independent variables

Unlike saturated properties, calculating superheated or subcooled properties requires two independent variables. CO₂Tab gives you 9 combinations of independent variables that you can choose from: Temperature and any one of Pressure, Volume, Enthalpy, Entropy, or Internal energy

or

Pressure and any one of Volume, Enthalpy, Entropy, or Internal energy

a. Select the first independent variable

Use the drop down list to select either Temperature or Pressure as the first independent variable

b. Select the second independent variable

Use the drop down list box to select the second independent variable. The choices available will depend on what you chose as the first independent variable.

3. Provide values for the independent variables

Type a number in each of the edit boxes next to the independent variable selections. Alternatively, you can type in or select a cell reference that contains a value for the specified independent variables.

4. Select carbon dioxide property required

Using the drop-down combo-box, select the property you want. Use the mouse or the cursor keys to scroll through the list of available properties until you come to the one you desire.

5. Provide an output cell reference

Notice that CO₂Tab has already filled this in with the currently selected cell reference. If this is not where you want the results to go, select or type in a different cell reference.

6. Click OK


CO₂Tab will calculate the requested property and place it in the specified output cell as a **formula**.

Depending on your choice of units and independent variables, the drop-down list box will show you the units in which the values are required

Tip: Click on a cell where you want the results before opening this dialog box. CO₂Tab will automatically fill in the Output cell reference

If you activate the superheated /subcooled dialog box on a cell that already contains a CO₂Tab function, then CO₂Tab will automatically initialize the dialog box with the correct values.

If you want a different superheated or subcooled property, simply repeat the above steps. Alternatively, you could copy the cell containing the superheated/subcooled property function and paste it in the location you want. You can then use the superheated/subcooled dialog box to change the output property.

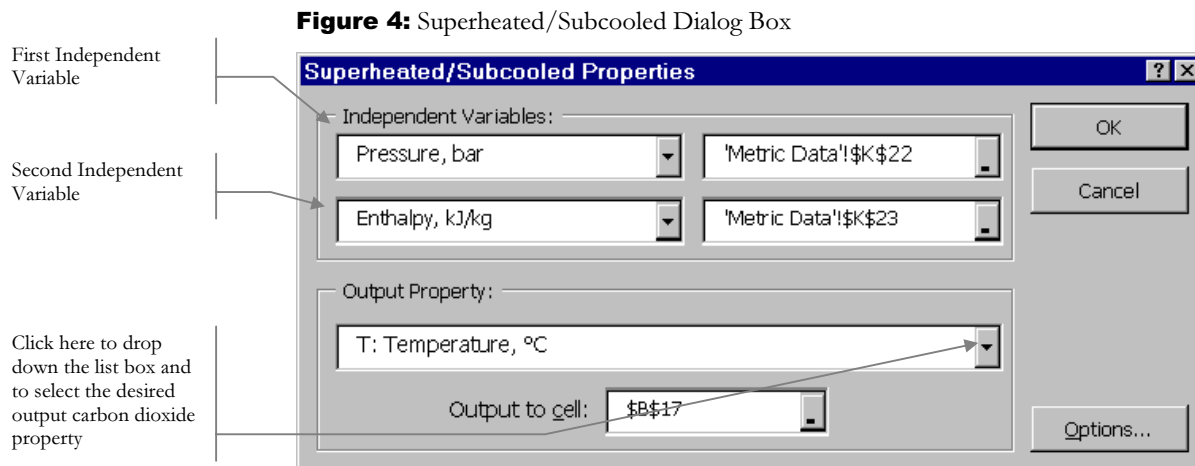

Using the Constant Properties Dialog Box

The constant properties dialog box gives you access to fundamental properties, such as, molecular weight, critical properties, and triple point properties.

The following steps illustrate how to use this dialog box (see the figure below for an illustration of this dialog box):

1. Select Options (Optional)

Click on the Options button to bring up the options dialog-box from where you can select the units, as described in the previous section. If you previously selected the units, you can skip this step.

2. Select constant property required

Using the drop-down combo-box, select the constant property you want. Use the mouse or the cursor keys to scroll through the list of available properties until you come to the one you desire.

3. Provide an output cell reference

Notice that CO₂Tab has already filled this in with the currently selected cell reference. If this is not where you want the results to go, select or type in a different cell reference.

Tip: Click on a cell where you want the results before opening this dialog box. CO₂Tab will automatically fill in the Output cell reference

4. Click OK


CO₂Tab will calculate the requested carbon dioxide property and place it in the specified output cell as a **formula**.

If you activate the constant property dialog box on a cell that already contains a constant property CO₂Tab function, then CO₂Tab will automatically initialize the dialog box with the correct values.

If you want a different constant property, simply repeat the above steps. Alternatively, you could copy the cell containing the constant property function and paste it in the location you want. You can then use the constant properties dialog box to change the output property.

The following figure illustrates the above steps.

Figure 5: Constant Property Dialog Box

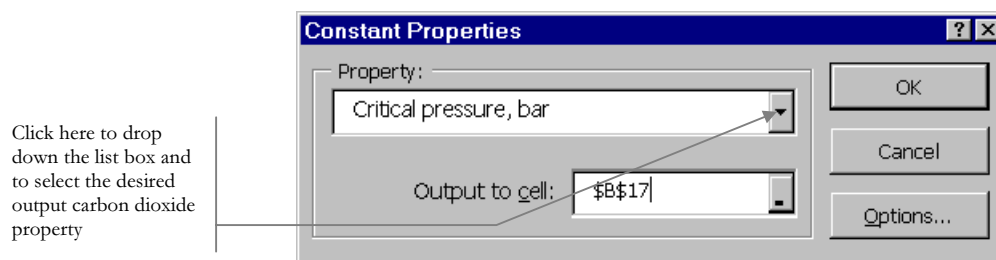

Using the Melting/Sublimation Dialog Box

The melting/sublimation property dialog box gives you access to the melting or sublimation pressure or temperature.

The following steps illustrate how to use this dialog box (see the figure below for an illustration of this dialog box):

1. Select Options (Optional)

Click on the Options button to bring up the options dialog-box from where you can select the units, as described in the previous section. If you previously selected the units, you can skip this step.

2. Select output property required

Using the radio buttons, select the desired output property.

3. Provide input data

Depending on the output property, you will have to give a value or a cell reference containing the value of the input variable.

4. Provide an output cell reference

Notice that CO₂Tab has already filled this in with the currently selected cell reference. If this is not where you want the results to go, select or type in a different cell reference.

Tip: Click on a cell where you want the results before opening this dialog box. CO₂Tab will automatically fill in the Output cell reference

5. Click OK


CO₂Tab will calculate the requested carbon dioxide property and place it in the specified output cell as a **formula**.

If you activate the melting / sublimation property dialog box on a cell that already contains a constant property CO₂Tab function, then CO₂Tab will automatically initialize the dialog box with the correct values.

If you want a different property, simply repeat the above steps. Alternatively, you could copy the cell containing the property function and paste it in the location you want. You can then use the properties dialog box to change the output property.

The following figure illustrates the above steps.

Figure 6: Melting/Sublimation Property Dialog Box

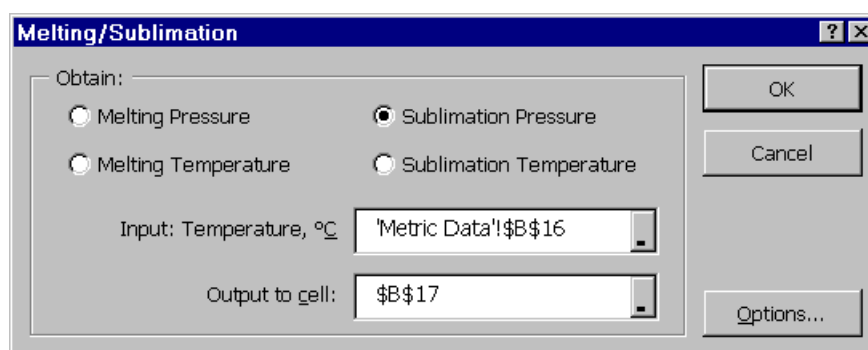

Using the Solubility in Water Dialog Box

The solubility in water dialog box gives you access to the molar or mass solubility of carbon dioxide in water.

The following steps illustrate how to use this dialog box (see the figure below for an illustration of this dialog box):

1. Select Options (Optional)

Click on the Options button to bring up the options dialog-box from where you can select the units, as described in the previous section. If you previously selected the units, you can skip this step.

2. Select Input Data

Select Temperature and Total Pressure or Temperature and Partial Pressure for your input data and provide the data in the respective edit boxes.

3. Select output property required

Using the drop-down list, select the output property. You can select either the vapor or liquid mole or mass fractions of carbon dioxide.

Tip: Click on a cell where you want the results before opening this dialog box. CO₂Tab will automatically fill in the Output cell reference

If you activate the solubility property dialog box on a cell that already contains a constant property CO₂Tab function, then CO₂Tab will automatically initialize the dialog box with the correct values.

4. Provide an output cell reference

Notice that CO₂Tab has already filled this in with the currently selected cell reference. If this is not where you want the results to go, select or type in a different cell reference.


5. Click OK

CO₂Tab will calculate the requested property and place it in the specified output cell as a **formula**.

If you want a different property, simply repeat the above steps. Alternatively, you could copy the cell containing the property function and paste it in the location you want. You can then use the properties dialog box to change the output property.

The following figure illustrates the above steps.

Figure 7: Solubility in Water Property Dialog Box

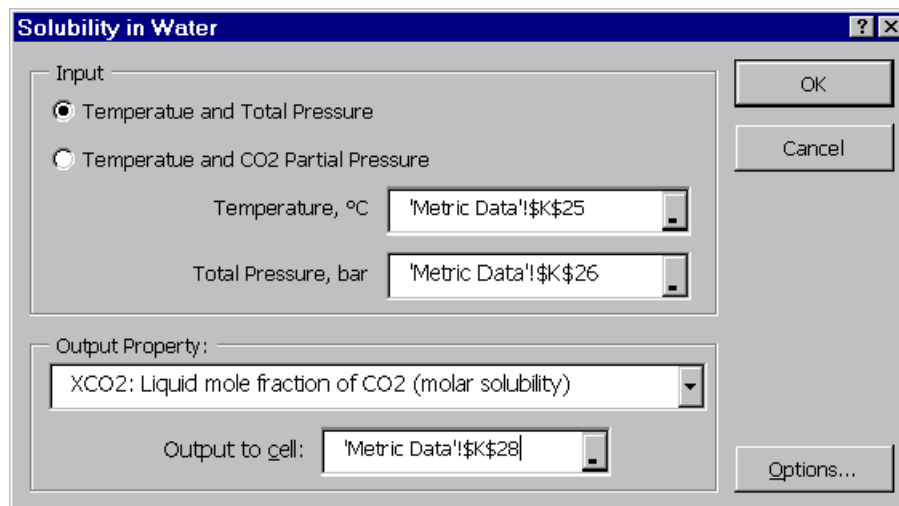

Function Reference

A triangle which has an angle of 135 degrees is called an obscene triangle.
– FreeBSD fortune cookie.

Overview



The CO₂Tab add-in package is based on a set of 29 core functions that together calculate over 40 thermodynamic and transport properties of carbon dioxide. You can use these functions directly in your spreadsheet or you can use CO₂Tab's easy-to-use dialog boxes to automatically generate the appropriate function call with the correct arguments.

CO₂Tab functions are divided into the following categories:

7. Functions for saturated vapor, liquid or two-phase properties (2 functions)

These two functions calculate saturated vapor, liquid and two-phase properties from the triple point up to the critical point. You can choose either temperature or pressure as the independent variable.

8. Functions for superheated vapor or subcooled liquid properties (9 functions)

The functions in this category provide you with a rich set of tools for conducting several constant-property processes. Depending on the choice of independent variables, you can model isentropic, isenthalpic, constant volume, or constant internal energy processes.

9. Melting and Sublimation Line Functions (4 functions)

The functions in this category calculate the melting and sublimation temperature or pressure.

10. Solubility in Water (2 functions)

You can obtain the solubility of carbon dioxide in water using the functions provided in this category.

**11. Functions for constant carbon dioxide properties
(12 functions)**

The 12 functions in this category give you access to fundamental carbon dioxide properties that are not functions of temperature or pressure, such as, molecular weight, critical properties, and triple point properties.

Note

All CO₂Tab functions begin with the prefix CD.

Table 2: Overview of CO₂Tab Functions

Function	Calculates at Specified	Calling Sequence Example
Saturated Vapor, Liquid, and Two-Phase Functions		
CDPSAT	pressure (<i>P</i>)	CDPSAT(<i>pressure, quality, code, units</i>)
CDTSAT	temperature (<i>T</i>)	CDTSAT(<i>temperature, quality, code, units</i>)
Superheated or Subcooled Functions		
CDTP	temperature and pressure (<i>T-P</i>)	CDTP(<i>temperature, pressure, code, units</i>)
CDTV	temperature and volume (<i>T-V</i>)	CDTV(<i>temperature, volume, code, units</i>)
CDTH	temperature and enthalpy (<i>T-H</i>)	CDTH(<i>temperature, enthalpy, code, units</i>)
CDTS	temperature and entropy (<i>T-S</i>)	CDTS(<i>temperature, entropy, code, units</i>)
CDTU	temperature and internal energy (<i>T-U</i>)	CDTU(<i>temperature, internal, code, units</i>)
CDPV	pressure and volume (<i>P-V</i>)	CDPV(<i>pressure, volume, code, units</i>)
CDPH	pressure and enthalpy (<i>P-H</i>)	CDPH(<i>pressure, enthalpy, code, units</i>)
CDPS	pressure and entropy (<i>P-S</i>)	CDPS(<i>pressure, entropy, code, units</i>)
CDPU	pressure and internal energy (<i>P-U</i>)	CDPU(<i>pressure, internal, code, units</i>)
Melting and Sublimation Functions		
CDPMELT	pressure at specified temperature (<i>T</i>)	CDPMELT(<i>temperature, units</i>)
CDTMELT	temperature at specified pressure (<i>P</i>)	CDTMELT(<i>pressure, units</i>)
CDPSUBL	pressure at specified temperature (<i>T</i>)	CDPSUBL(<i>temperature, units</i>)
CDTSUBL	temperature at specified pressure (<i>P</i>)	CDTSUBL(<i>pressure, units</i>)
Solubility in Water Functions		
CDSOLU	temperature and total pressure	CDSOLU(<i>temperature, pressure, code, units</i>)
CDSOLUPP	temperature and CO ₂ partial pressure	CDSOLUPP(<i>temperature, pressure, code, units</i>)
Constant Properties Functions		
CDWM	Molecular weight	CDMW(<i>units</i>)
CDTC	Critical temperature	CDTC(<i>units</i>)
CDPC	Critical pressure	CDPC(<i>units</i>)
CDVC	Critical specific volume	CDVC(<i>units</i>)
CDRC	Critical specific density	CDRC(<i>units</i>)
CDZC	Critical compressibility factor	CDZC(<i>units</i>)
CDTPT	Triple point temperature	CDTPT(<i>units</i>)
CDTPP	Triple point pressure	CDTPP(<i>units</i>)
CDTMIN	Minimum temperature range	CDTMIN(<i>units</i>)
CDTMAX	Maximum temperature range	CDTMAX(<i>units</i>)
CDPMIN	Minimum pressure range	CDPMIN(<i>units</i>)
CDPMAX	Maximum pressure range	CDPMAX(<i>units</i>)

In the CO₂Tab functions, *units* is an optional argument. You need not specify *units*, in which case all requested properties are returned in Metric/SI units, that is, the default value is 0. For carbon dioxide properties in English units, set *units* to 1. However, in Lotus 1-2-3 *units* is a required argument, that it, it has to be explicitly specified as 0 for Metric/SI units and 1 for English units.

The argument *quality* is used to specify the saturated carbon dioxide quality (vapor mass fraction) or to specify the two-phase carbon dioxide quality. Use a value of 1 for saturated vapor, 0 for saturated liquid and between 0 and 1 for two-phase. The CO₂Tab functions also return *quality* as a calculated property. If the quality cannot be determined, then a value of -1 is returned. If the phase is superheated vapor, then a *quality* of -2 is returned, and if the phase is subcooled liquid a *quality* of -3 is returned.

The argument *code*, is an integer argument or a string identifier that specifies the type of carbon dioxide property requested. Valid values of *code* and the units in which they are returned are shown in the table below. For example, to obtain the enthalpy you can specify a code of either 8 or H.

Table 3: Property Codes for Thermodynamic and Transport Properties

Code	Property	Metric Units	English Units	
0	T	Temperature, T	°C	°F
1	P	Pressure, P	bar	psia
2	V	Volume, V	m ³ /kg	ft ³ /lb
3	D	Density, ρ	kg/m ³	lb/ft ³
4	Z	Compressibility factor, Z	dimensionless	dimensionless
5	A	Helmoltz free energy, A	kJ/kg	Btu/lb
6	S	Entropy, S	kJ/(kg·°C)	Btu/(lb·°F)
7	U	Internal energy, U	kJ/kg	Btu/lb
8	H	Enthalpy, H	kJ/kg	Btu/lb
9	G	Gibbs free energy, G	kJ/kg	Btu/lb
10	CV	Heat capacity at constant volume, C_v	kJ/(kg·°C)	Btu/(lb·°F)
11	CP	Heat capacity at constant pressure, C_p	kJ/(kg·°C)	Btu/(lb·°F)
12	W	Speed of sound, v	m/s	ft/s
13	ALPHA	Coefficient of thermal expansion, $\alpha = \rho(\partial V/\partial T)_p$	1/°C	1/°F
14	KAPPA	Isothermal compressibility, $\kappa = -\rho(\partial V/\partial P)_T$	1/bar	1/psia
15	DPDT	dpdt, $(\partial P/\partial T)_V$	bar/°C	psia/°F
16	DVDT	dvdt, $(\partial V/\partial T)_p$	m ³ /(kg·°C)	ft ³ /(lb·°F)
17	DVDP	dvdP, $(\partial V/\partial P)_T$	m ³ /(kg·bar)	ft ³ /(lb·psi)
18	MU	Viscosity (dynamic), μ	μPa·s	lb/(ft·hr)
19	KT	Thermal conductivity, K	W/(m·°C)	Btu/(hr·ft·°F)
20	ST	Surface tension, σ	N/m	N/m
21	PR	Prandtl number, N_{Pr}	dimensionless	dimensionless
22	DC	Static dielectric constant	dimensionless	dimensionless
23	IJT	Isothermal Joule-Thomson coefficient	kJ/(kg·bar)	Btu/(lb·psia)
24	JT	Joule-Thomson coefficient	°C/bar	°F/psia
25	Q	Quality (vapor mass fraction)	dimensionless	dimensionless

Note

By definition, the thermodynamic reference state of carbon dioxide is at a temperature of 25°C (298.15K) and 0.101325 MPa where the ideal gas enthalpy and entropy are set to zero.

Functions for Saturated Properties



The functions for saturated carbon dioxide properties calculate vapor, liquid or two-phase properties at either specified pressure or specified temperature. The applicable range of these functions is from the triple point up to the critical point.

Depending on your choice of independent variable, the two functions you can choose are:

Independent Variable	Use Function
Pressure	CDPSAT
Temperature	CDTSAT

These functions are described in detail below.

CDPSAT

Calculates the saturated vapor or liquid property at the specified pressure

Syntax

CDPSAT(*pressure*, *quality*, *property_code*, *units*)

Arguments

<i>pressure</i>	is the pressure at which the saturated property is required. See the Remarks section for acceptable pressure units.
<i>quality</i>	is 1 for vapor phase properties, 0 for liquid phase properties and between 0 and 1 for two-phase.
<i>property_code</i>	is an integer property code or a string identifier that specifies the type of property required. See Table 3: Property Codes for Thermodynamic and Transport Properties (page 20) for a listing of valid property codes.
<i>units</i>	is an optional integer argument. For Metric/SI units, specify a value of 0 (or leave empty). For English units, specify a value of 1.

Remarks

- The specified pressure unit must be in bar if *units* is 0; and must be in psia if *units* is 1.
- The pressure must be greater than or equal to the Triple Point Pressure and less than or equal to the Critical Pressure.

- If any of the arguments are invalid or if the arguments are outside the acceptable bounds, the function returns the #VALUE! error.

CDTSAT

Calculates the saturated vapor, liquid or two-phase property at the specified temperature.

Syntax

CDTSAT(temperature, quality, property_code, units)

Arguments

temperature	is the temperature at which the saturated property is required. See the Remarks section for acceptable temperature units.
quality	is 1 for vapor phase properties, 0 for liquid phase properties and between 0 and 1 for two-phase.
property_code	is an integer property code or string identifier that specifies the type of property required. See Table 3: Property Codes for Thermodynamic and Transport Properties (page 20) for a listing of valid property codes and their meaning.
units	is an optional integer argument. For Metric/SI units, specify a value of 0 (or leave empty). For English units, specify a value of 1.

Remarks

- The specified temperature unit must be in °C if *units* is 0; and must be in °F if *units* is 1.
- The specified temperature must be greater than or equal to the Triple Point Temperature (0.01°C) and less than or equal to the Critical Temperature (373.976°C).
- If any of the arguments are invalid or if the arguments are outside the acceptable bounds, the function returns the #VALUE! error.

Functions for Superheated or Subcooled Properties



The functions in this category calculate the superheated vapor or subcooled liquid property at any two specified independent variables. These functions have a wide range of applicability. Generally, the properties returned by these functions are acceptable within the following ranges:

- Pressure (P , bar): $0 \leq P \leq 8,000$
- Temperature (T , °C): $-73.15 \leq T \leq 826.85$

The superheated/subcooled functions require two independent variables as input. Use the following table as a guide to select the appropriate function.

Specified Independent Variable		
First Variable	Second Variable	Use Function
Temperature, T	Pressure, P	CDTP
Temperature, T	Volume, V	CDTV
Temperature, T	Enthalpy, H	CDTH
Temperature, T	Entropy, S	CDTS
Temperature, T	Internal Energy, U	CDTU
Pressure, P	Volume, V	CDPV
Pressure, P	Enthalpy, H	CDPH
Pressure, P	Entropy, S	CDPS
Pressure, P	Internal Energy, U	CDPU

All of these functions have a similar syntax and arguments as described below.

General Description

General Syntax

CDXX(first_variable, second_variable, property_code, units)

Replace CDXX with the appropriate function name.

General Arguments

first_variable is the first independent variable.

second_variable is the second independent variable .

property_code is an integer property code or a string identifier that specifies the type of property required. See **Table 3:** Property Codes for Thermodynamic and Transport Properties (page 20) for a listing of valid property codes and their meaning.

units is an optional integer argument. For Metric/SI units, specify a value of 0 (or leave empty). For English units, specify a value

of 1.

General Remarks

- If any of the arguments are invalid or if the arguments are outside the acceptable bounds, the function returns the #VALUE! error.
- Some of these functions solve for the pressure iteratively. Therefore, it is possible that the function may fail to converge, in which case the function returns the above error codes.

Functions for Constant Properties



The functions in this category return constant properties, such as, the molecular weight, critical properties, and triple point properties.

The constant property functions are:


Function	Calculates	Metric/SI Units	English Units
CDMW	Molecular weight	kg/kmol	lb/lbmol
CDTC	Critical temperature	°C	°F
CDPC	Critical pressure	bar	psia
CDVC	Critical specific volume	m ³ /kg	ft ³ /lb
CDRC	Critical specific density	kg/m ³	lb/ft ³
CDZC	Critical compressibility factor	dimensionless	dimensionless
CDTPT	Triple point temperature	°C	°F
CDTPP	Triple point pressure	bar	psia
CDTMIN	Minimum temperature	°C	°F
CDTMAX	Maximum temperature	°C	°F
CDPMIN	Minimum pressure	bar	psia
CDPMAX	Maximum pressure	bar	psia

All of the functions in this category take an optional integer argument: *units* which is 0 or Metric units. For constant properties in English units set this argument to 1.

Note

If you want to use the default argument you need not specify any value. In this case, use the “empty” parenthesis, for example, =CDTC().

Melting and Sublimation Line Functions



The functions in this category obtain the temperature or pressure along the melting and sublimation lines. The functions in this category are:

Function	Calculates
CDPMELT	Melting pressure at specified temperature
CDTMELT	Melting temperature at specified pressure
CDPSUBL	Sublimation pressure at specified temperature
CDTSUBL	Sublimation temperature at specified pressure

All of these functions have a similar syntax and arguments as described below.

General Description

General Syntax

CDXX(input, *units*)

Replace CDXX with the appropriate function name.

General Arguments

input is the input variable (temperature or pressure)
units is an optional integer argument. For Metric/SI units, specify a value of 0 (or leave empty). For English units, specify a value of 1.

General Remarks

- If any of the arguments are invalid or if the arguments are outside the acceptable bounds, the function returns the #VALUE! error.

Functions for Solubility in Water



The solubility functions return the solubility of carbon dioxide in water as a function of temperature and either total pressure or the partial pressure of carbon dioxide. The solubility functions are based on:

Reference

“The Solubility of Carbon Dioxide in Water at Low Pressure”,
John J. Carroll, John D. Slupsky, Alan E. Mather, J. Phy. Chem.
Ref. Data, Vol. 20, No. 6, 1991

The functions are:

Function	Calculates
CDSOLU	Solubility at specified temperature and total pressure
CDSOLUPP	Solubility at specified temperature and CO ₂ partial pressure

Each of these functions takes a property code as:

Table 4: Solubility Property Codes

Property Code	Description
0 XCO2	Liquid mole fraction of CO ₂ (molar solubility)
1 YCO2	Vapor mole fraction of CO ₂
2 XWCO2	Liquid mass fraction of CO ₂ (mass solubility)
3 YWCO2	Vapor mass fraction of CO ₂

Range

The solubility functions are valid from 0°C to 160°C up to a total pressures of 10 bar absolute.

CDSOLU

Calculates the solubility of carbon dioxide in water at the specified temperature and total pressure.

Syntax

CDSOLU(temperature, pressure, property_code, units)

Arguments

temperature	is the temperature at which the solubility is required.
pressure	is the total pressure at which the solubility is required.
property_code	is an integer property code or string identifier that specifies the type of solubility required. See Table 4: Solubility Property Codes (page 26) for a listing of valid property codes and their meaning.
<i>units</i>	is an optional integer argument. For Metric/SI units, specify a value of 0 (or leave empty). For English units, specify a value of 1.

CDSOLUPP

Calculates the solubility of carbon dioxide in water at the specified temperature and CO₂ partial pressure.

Syntax

CDSOLU(temperature, partial_pressure, property_code, *units*)

Arguments

temperature	is the temperature at which the solubility is required.
partial_pressure	is the CO ₂ partial pressure at which the solubility is required.
property_code	is an integer property code or string identifier that specifies the type of solubility required. See Table 4: Solubility Property Codes (page 26) for a listing of valid property codes and their meaning.
<i>units</i>	is an optional integer argument. For Metric/SI units, specify a value of 0 (or leave empty). For English units, specify a value of 1.

CO₂Tab™ Quick Reference

Function	Calculates at Specified	Calling Sequence Example
Saturated Vapor, Liquid, and Two-Phase Functions		
CDPSAT	pressure (<i>P</i>)	CDPSAT(pressure, quality, code, units)
CDTSAT	temperature (<i>T</i>)	CDTSAT(temperature, quality, code, units)
Superheated or Subcooled Functions		
CDTP	temperature and pressure (<i>T-P</i>)	CDTP(temperature, pressure, code, units)
CDTV	temperature and volume (<i>T-V</i>)	CDTV(temperature, volume, code, units)
CDTH	temperature and enthalpy (<i>T-H</i>)	CDTH(temperature, enthalpy, code, units)
CDTS	temperature and entropy (<i>T-S</i>)	CDTS(temperature, entropy, code, units)
CDTU	temperature and internal energy (<i>T-U</i>)	CDTU(temperature, internal, code, units)
CDPV	pressure and volume (<i>P-V</i>)	CDPV(pressure, volume, code, units)
CDPH	pressure and enthalpy (<i>P-H</i>)	CDPH(pressure, enthalpy, code, units)
CDPS	pressure and entropy (<i>P-S</i>)	CDPS(pressure, entropy, code, units)
CDPU	pressure and internal energy (<i>P-U</i>)	CDPU(pressure, internal, code, units)
Melting and Sublimation Functions		
CDPMELT	pressure at specified temperature (<i>T</i>)	CDPMELT(temperature, units)
CDTMELT	temperature at specified pressure (<i>P</i>)	CDTMELT(pressure, units)
CDPSUBL	pressure at specified temperature (<i>T</i>)	CDPSUBL(temperature, units)
CDTSUBL	temperature at specified pressure (<i>P</i>)	CDTSUBL(pressure, units)
Solubility in Water Functions		
CDSOLU	temperature and total pressure	CDSOLU(temperature, pressure, code, units)
CDSOLUPP	temperature and CO ₂ partial pressure	CDSOLUPP(temperature, pressure, code, units)
Constant Properties Functions		
CDWM	Molecular weight	CDMW(units)
CDTC	Critical temperature	CDTC(units)
CDPC	Critical pressure	CDPC(units)
CDVC	Critical specific volume	CDVC(units)
CDRC	Critical specific density	CDRC(units)
CDZC	Critical compressibility factor	CDZC(units)
CDTPT	Triple point temperature	CDTPT(units)
CDTPP	Triple point pressure	CDTPP(units)
CDTMIN	Minimum temperature range	CDTMIN(units)
CDTMAX	Maximum temperature range	CDTMAX(units)
CDPMIN	Minimum pressure range	CDPMIN(units)
CDPMAX	Maximum pressure range	CDPMAX(units)

Quality (vapor mass fraction)	
0	Saturated Liquid
1	Saturated Vapor
0 < Q < 1	Two-phase
-1*	Indeterminate*
-2*	Superheated vapor*
-3*	Subcooled liquid*

Units	
0 or none	Metric/SI
1	English

*Cannot be specified as a function argument. Only returned as a calculated value.

CO₂Tab™ Quick Reference

Code	Carbon Dioxide Property	Metric/SI Units	English Units
0	T Temperature, T	°C	°F
1	P Pressure, P	bar	psia
2	V Volume, V	m ³ /kg	ft ³ /lb
3	D Density, ρ	kg/m ³	lb/ft ³
4	Z Compressibility factor, Z	dimensionless	dimensionless
5	A Helmholtz free energy, A	kJ/kg	Btu/lb
6	S Entropy, S	kJ/(kg·°C)	Btu/(lb·°F)
7	U Internal energy, U	kJ/kg	Btu/lb
8	H Enthalpy, H	kJ/kg	Btu/lb
9	G Gibbs free energy, G	kJ/kg	Btu/lb
10	CV Heat capacity at constant volume, C_v	kJ/(kg·°C)	Btu/(lb·°F)
11	CP Heat capacity at constant pressure, C_p	kJ/(kg·°C)	Btu/(lb·°F)
12	W Speed of sound, ν	m/s	ft/s
13	ALPHA Coefficient of thermal expansion, $\alpha = \rho(\partial V/\partial T)_p$	1/°C	1/°F
14	KAPPA Isothermal compressibility, $\kappa = -\rho(\partial V/\partial P)_T$	1/bar	1/psia
15	DPDT dpdt, $(\partial P/\partial T)_V$	bar/°C	psia/°F
16	DVDT dvdt, $(\partial V/\partial T)_p$	m ³ /(kg·°C)	ft ³ /(lb·°F)
17	DVDP dvdp, $(\partial V/\partial P)_T$	m ³ /(kg·bar)	ft ³ /(lb·psi)
18	MU Viscosity (dynamic), μ	μPa·s	lb/(ft·hr)
19	KT Thermal conductivity, K	W/(m·°C)	Btu/(hr·ft·°F)
20	ST Surface tension, σ	N/m	N/m
21	PR Prandtl number, N_{Pr}	dimensionless	dimensionless
22	DC Static dielectric constant	dimensionless	dimensionless
23	IJT Isothermal Joule-Thomson coefficient	kJ/(kg·bar)	Btu/(lb·psia)
24	JT Joule-Thomson coefficient	°C/bar	°F/psia
25	Q Quality (vapor mass fraction)	dimensionless	dimensionless
Code	Solubility in Water Property	Metric/SI Units	English Units
0	XCO2 Liquid mole fraction of CO ₂ (molar solubility)	dimensionless	dimensionless
1	YCO2 Vapor mole fraction of CO ₂	dimensionless	dimensionless
2	XWCO2 Liquid mass fraction of CO ₂ (mass solubility)	dimensionless	dimensionless
3	YWCO2 Vapor mass fraction of CO ₂	dimensionless	dimensionless