


SteamTab *Duo*[®] V4.0 User's Guide

THERMODYNAMIC AND TRANSPORT PROPERTIES OF WATER AND STEAM

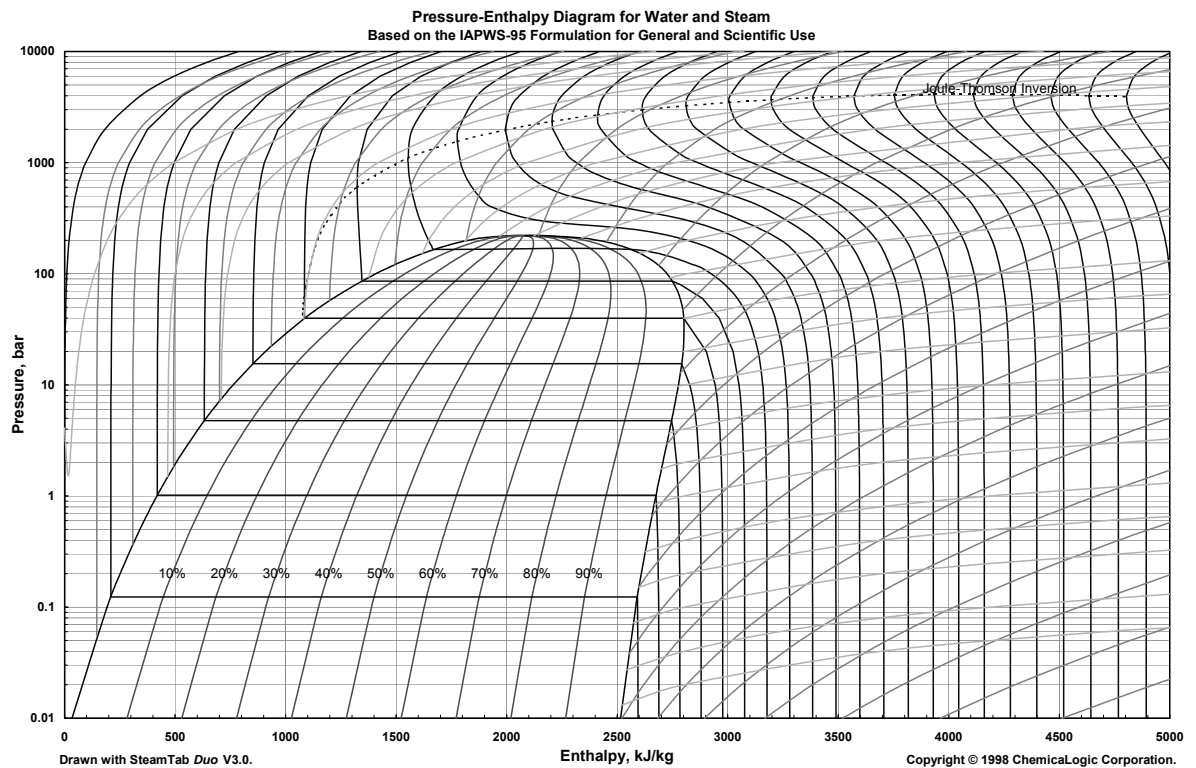

CHEMICALLOGIC

Software License Agreement

NOTICE: THIS IS A CONTRACT. BY INSTALLING AND USING THE SOFTWARE INDICATED BELOW, YOU ARE IMPLICITLY ACCEPTING ALL THE TERMS AND CONDITIONS OF THIS AGREEMENT.

SteamTab Duo® Thermodynamic and Transport Properties of Water and Steam

This ChemicalLogic Corporation ("ChemicalLogic") License Agreement accompanies the software product identified above and related documentation (SOFTWARE). The term SOFTWARE shall also include any upgrades, modified versions or updates of the SOFTWARE licensed to you by ChemicalLogic. You must read this Agreement carefully before indicating acceptance at the end of the text of this Agreement. If you do not agree with the terms and conditions of this Agreement, decline where instructed during installation, and you will not be able to use the SOFTWARE. ChemicalLogic grants to you a nonexclusive license to use the SOFTWARE, provided that you agree to the following:

USE You (an entity or a person) may use the SOFTWARE either on a stand-alone computer or on a network if you meet the following conditions.

STAND-ALONE COMPUTER USE You must acquire one copy of the SOFTWARE for each computer on which the SOFTWARE will be installed. The primary user of the computer may also use the SOFTWARE on a home and/or laptop computer, provided the SOFTWARE is used on only one computer at a time.

SHARED NETWORK USE You may use the SOFTWARE on a network provided you have purchased SOFTWARE equal to the maximum number of copies in use at any time. The SOFTWARE is "in use" on a computer when it is resident in memory or when executable and other files are installed on the hard drive or other storage device. Software which is stored on a server and not resident in memory on that machine is not considered "in use".

UPGRADES If the SOFTWARE is an upgrade, you are authorized to use the SOFTWARE only if you are an authorized user of a qualifying product as determined by ChemicalLogic. The upgrade SOFTWARE replaces the qualifying product.

RESTRICTIONS You may not alter, reverse engineer, decompile, or disassemble the SOFTWARE. You may not loan, rent, lease, or license the SOFTWARE or any copy. However, you may transfer the SOFTWARE on a permanent basis provided you transfer the SOFTWARE including the most recent update and all prior versions, this SOFTWARE Agreement, and all documentation and media, and you do not retain any copies.

COPYRIGHT The SOFTWARE is owned by ChemicalLogic Corporation, and its structure, organization and code are the valuable trade secrets of ChemicalLogic. The SOFTWARE is also protected by United States Copyright Law and International Treaty provisions. You agree not to modify, adapt, translate, reverse engineer, decompile, disassemble or otherwise attempt to discover the source code of the SOFTWARE. You may use trademarks only to identify printed output produced by the SOFTWARE, in accordance with accepted trademark practice, including identification of trademark owner's name. Such use of any trademark does not give you any rights of ownership in that trademark. Except as stated above, this Agreement does not grant you any intellectual property rights in the SOFTWARE.

TRANSFER You may not rent, lease, or sub-license the SOFTWARE. You may, however, transfer all your rights to use the SOFTWARE to another person or entity, provided that you transfer this Agreement with the SOFTWARE.

LIMITED WARRANTY For ninety (90) days from your date of purchase, ChemicalLogic warrants that the magnetic media and the user documentation (if any) are free from defects in material and workmanship. ChemicalLogic will, at its option, either refund the amount you paid or provide you with corrected items at no charge provided that the defective item(s) is (are) returned to ChemicalLogic within ninety (90) days from the date of purchase. Except as specifically provided herein, ChemicalLogic makes no warranty, representation, promise, or guarantee, either express or implied, statutory or otherwise, with respect to the SOFTWARE, including but not limited to implied warranties of merchantability, fitness for a particular purpose and noninfringement. ChemicalLogic is not responsible for, and does not make any representation, warranty, or condition concerning product, media, software, or documentation not manufactured or supplied by ChemicalLogic, such as third parties' programs that are designed to use or include the SOFTWARE.

LIMITATION OF LIABILITY Because software is inherently complex and may not be completely free of errors, you are advised to verify your work and to make backup copies. In no event will ChemicalLogic be liable for any damages whatsoever (including, without limitation, damages for loss of business profits, business interruption, loss of business information, or other pecuniary loss) arising out of the use of or inability to use the software, user documentation, or related technical support, even if ChemicalLogic has been advised of the possibility of such damages. In no case shall ChemicalLogic' liability exceed the amount paid by you for the SOFTWARE. Because some states do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation may not apply to you.

GOVERNING LAW AND GENERAL PROVISIONS This Agreement will be governed by the laws of the Commonwealth of Massachusetts U.S.A., excluding the application of its conflicts of law rules. This Agreement will not be governed by the United Nations Convention on Contracts for the International Sale of Goods, the application of which is expressly excluded. If any part of this Agreement is found void and unenforceable, it will not affect the validity of the balance of the Agreement, which shall remain valid and enforceable according to its terms. You agree that the SOFTWARE will not be shipped, transferred or exported into any country or used in any manner prohibited by the United States Export Administration Act or any other export laws, restrictions or regulations. This Agreement shall automatically terminate upon failure by you to comply with its terms. This Agreement may only be modified in writing signed by an authorized officer of ChemicalLogic Corporation.

U.S. GOVERNMENT RESTRICTED RIGHTS The SOFTWARE and/or user documentation are provided with RESTRICTED AND LIMITED RIGHTS. Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of The Rights in Technical Data and Computer SOFTWARE clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer SOFTWARE - Restricted Rights at 48 CFR 52.227-19, as applicable. Manufacturer/contractor is ChemicalLogic Corporation, 99 South Bedford Street, Suite 207, Burlington MA 01803, USA.

SteamTab Duo® is Copyright © 1995-2014 by ChemicalLogic Corporation.

SteamTab Duo® is a registered trademark of ChemicalLogic Corporation.

ChemicalLogic™ is a trademark of ChemicalLogic Corporation.

All other trademarks and copyrights are hereby acknowledged.

Table of Contents



INTRODUCTION TO STEAMTAB DUO®	3
OVERVIEW AND FEATURES	3
WHAT'S NEW IN VERSION 4.0	5
TECHNICAL SUPPORT AND CONTACT INFORMATION	6
GETTING STARTED	7
MINIMUM SYSTEM REQUIREMENTS	7
INSTALLATION	7
USING STEAMTAB DUO	8
<i>Where is SteamTab Duo?</i>	8
<i>Setting Steam Property Options</i>	9
<i>Using the Saturated Steam Properties Dialog Box</i>	10
<i>Using the Superheated/Subcooled Steam Properties Dialog Box</i>	12
<i>Using the Constant Steam Properties Dialog Box</i>	14
<i>Using Excel's Function Wizard</i>	15
<i>Using SteamTab Duo in Excel's Visual Basic for Applications (VBA)</i>	16
TIPS AND TRICKS	18
TUTORIAL	19
INTRODUCTION	19
EXAMPLE 1: ENTHALPY OF VAPORIZATION	20
EXAMPLE 2: CONSTANT PROPERTY PROCESS	23
FUNCTION REFERENCE	25
OVERVIEW	25
FUNCTIONS FOR SATURATED STEAM PROPERTIES	29
<i>STPSAT, ASTPSAT</i>	29
<i>STTSAT, ASTTSAT</i>	30
FUNCTIONS FOR SUPERHEATED OR SUBCOOLED STEAM PROPERTIES	31
<i>General Description</i>	32
<i>STTP, ASTTP</i>	33
<i>STTV, ASTTV</i>	33
<i>STTH, ASTTH</i>	34
<i>STTS, ASTTS</i>	34
<i>STTU, ASTTU</i>	35
<i>STPV, ASTPV</i>	35
<i>STPH, ASTPH</i>	35
<i>STPS, ASTPS</i>	36
<i>STPU, ASTPU</i>	36
FUNCTIONS FOR CONSTANT STEAM PROPERTIES	37
<i>Examples</i>	37

List of Tables

TABLE 1: STEAMTAB <i>Duo</i> MODEL FORMULATIONS	5
TABLE 2: OVERVIEW OF STEAMTAB <i>Duo</i> FUNCTIONS: SCIENTIFIC FORMULATION (IAPWS-95)	26
TABLE 3: OVERVIEW OF STEAMTAB <i>Duo</i> FUNCTIONS: INDUSTRIAL FORMULATION (IAPWS-97)	27
TABLE 4: PROPERTY CODES FOR THERMODYNAMIC AND TRANSPORT PROPERTIES OF STEAM.....	28

List of Figures

FIGURE 1: ACCESS TO STEAMTAB <i>Duo</i> IN EXCEL 2011 FOR MAC OSX.....	8
FIGURE 2: STEAM PROPERTY OPTIONS DIALOG	10
FIGURE 3: SATURATED STEAM PROPERTIES DIALOG	12
FIGURE 4: SUPERHEATED/SUBCOOLED DIALOG BOX	14
FIGURE 5: CONSTANT PROPERTY DIALOG BOX.....	15
FIGURE 6: CHEMICALLOGIC STEAMTAB <i>Duo</i> FUNCTIONS IN EXCEL'S FORMULA BUILDER	16
FIGURE 7: EXCEL VBA REFERENCE TO STEAMTAB <i>Duo</i>	17
FIGURE 8: TUTORIAL EXAMPLE 1.....	21
FIGURE 9: TUTORIAL EXAMPLE 2.....	24


Introduction to SteamTab *Duo*[®]

Whatever creativity is, it is in part a solution to a problem.

– Brian Aldiss (b. 1925),

Bury My Heart at W. H. Smith's, "Apéritif" (1990).

Overview and Features



Designers of steam processing systems and equipment use a variety of conventional methods to look up steam properties for engineering calculation, including printed steam tables in different units, stand-alone steam property software, proprietary design software, general-purpose process simulators and long-hand calculations from fundamental equations. Lookup from printed steam tables remains the most frequently used method for daily use of steam properties. The interpolation of property values between fixed state points is a tedious, boring and prone-to-error exercise that has plagued many generations of engineers.

SteamTab *Duo*, designed as an add-in package to popular spreadsheet applications, allows users the convenient access, without leaving the spreadsheet computation environment, to a variety of steam property values. SteamTab *Duo* contains a comprehensive set of thermodynamic and transport properties applicable over a wide range of conditions, with selected derivative and dimensionless properties.

SteamTab Duo sets a new standard in capability and ease of use for steam property generation. SteamTab Duo contains all of the features of SteamTab Duo Version 4.0. In addition, with SteamTab Duo, you can choose from 2 different formulations to base steam property calculations:

1. Scientific Formulation (IAPWS-95): This is the formulation approved by the International Association of the Properties of Water and Steam (IAPWS) in 1995 for general and scientific use. This formulation is more

thermodynamically rigorous, accurate, and applicable over wider range of conditions.

2. Industrial Formulation (IAPWS-IF97): This is the IAPWS approved formulation of industrial and special use. The industrial formulation is based on an approximation of the scientific formulation and is generally used in situations where computational speed is of importance.

SteamTab *Duo* uses fundamental equations to calculate all steam properties with no interpolation or curve fits to raw steam data. With SteamTab *Duo*, users have a choice of basing their steam property calculations from either the scientific formulation, or the industrial formulation. The formulations used in SteamTab *Duo* and their references are shown in the following table.

SteamTab *Duo* is designed as a low-cost, personal productivity-enhancement tool, for steam property users in the scientific, engineering, plant operation and educational communities.

SteamTab *Duo* contains the following features:

- Easy access to a comprehensive set of thermodynamic and transport steam properties from the spreadsheet's Tools menu
- Direct "live" links to variable steam conditions by cell reference
- Choice of Metric/SI or English units
- Direct calculation of steam outlet conditions for isentropic, isenthalpic, constant internal energy or constant volume process
- SteamTab functions for saturated vapor-liquid, superheated, subcooled, and constant steam properties
- Generation of your own steam property diagrams using the spreadsheet's charting capability
- Export of steam property values to other applications – limited only by the spreadsheet's file transfer capability
- Examples for Expander, Compressor, Pressure Letdown, Relative Humidity, etc.

Table 1: SteamTab *Duo* Model Formulations

SteamTab <i>Duo</i> Formulations	Description
Scientific Formulation (IAPWS-95)	<p>The scientific formulation is described in the following reference: <i>Release on the IAPWS Formulation 1995 for the Thermodynamic Properties of Ordinary Water Substance for General and Scientific Use</i>, The International Association for the Properties of Water and Steam, Frederica, Denmark, Sept. 1996.</p> <p>The scientific formulation is valid in the entire stable fluid region of water from the melting pressure curve starting at 251.165 K to 1273 K at pressures up to 1,000 MPa. The formulation can also be extrapolated to pressures up to about 100 GPa and temperatures up to 5000 K.</p> <p>SteamTab <i>Duo</i> imposes the following temperature and pressure restrictions:</p> <p>Pressure (P, bar): $0 \leq P \leq 100,000$</p> <p>Temperature (T, K): $190 \leq T \leq 5000$</p>
Industrial Formulation (IAPWS-97)	<p>The industrial formulation is described in the following reference: <i>Release on the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam</i>, The International Association for the Properties of Water and Steam, Erlangen, Germany, 1997.</p> <p>This formulation has the following range of applicability:</p> <p>Pressure (P, bar): $0 \leq P \leq 1,000$</p> <p>Temperature (T, K): $273.15 \text{ K} \leq T \leq 1073.15$ (for $P \leq 1,000$) $1073.15 \text{ K} \leq T \leq 2273.17$ (for $P \leq 100$)</p>

Note

SteamTab *Duo* does not include properties for ice.

What's New in Version 4.0

SteamTab *Duo* Version 4.0 offers a number of enhancements:

- SteamTab *Duo* V4.0 supports Mac Excel version 2011 running on Mac OSX 10.5 or later.
- Includes automatic installation (and uninstalling) on the supported platforms.
- Fully compatible with all previous versions of SteamTab *Duo*.

- The ability to use a numeric property code as well as a mnemonic string (the string version is *case insensitive*). For example, to calculate the enthalpy of steam you can use either 8 or “H”.
- Added two new properties: the isentropic exponent and latent heat of vaporization.

Technical Support and Contact Information



ChemicalLogic offers free technical support with the purchase of SteamTab *Duo*. If you have any problems during installation or use of SteamTab *Duo*, please contact us at one of the addresses listed below.

Before requesting support, it would save both your time and our time if you could first do the following:

- Make sure you have read any relevant portions of the manual
- Isolate the problem to a small test case
- Have the version number of your copy of SteamTab *Duo* ready
- Have the version number of the spreadsheet application and the operating system on which it is installed ready

You can contact us via any of the following paths:

By Telephone: 978.254.1218 (9 AM to 5 PM, EST)

By Email: clc.support@chemicallogic.com

By Web: <http://www.chemicallogic.com>

By Mail: ChemicalLogic Corporation
222 Stoney Gate
Carlisle, Massachusetts 01741
USA

Car·not, Nicolas Léonard Sadi

Car·not (kär-no'), Nicolas Léonard Sadi

1796-1832

French physicist and engineer who founded the science of thermodynamics.

Getting Started

The reality is that zero defects in products plus zero pollution plus zero risk on the job is equivalent to maximum growth of government plus zero economic growth plus runaway inflation.

– Dixie Lee Ray (1924–94), U.S. Democratic politician, government official.

“Scientists and Engineers for Secure Energy,” speech, 1980.

Quoted in: Esther Stineman, American Political Women (1980).

Minimum System Requirements



You should not encounter any hardware or software problems in using SteamTab *Duo* on any hardware that has one of the following spreadsheet applications pre-installed:

- Microsoft Excel 2011 running on Mac OSX 10.5 or later

Installation

SteamTab *Duo* contains an automatic installation program that will install the add-in within Excel as well as certain document files

To install SteamTab *Duo*, simply click on the file STEAMTAB DUO.PKG and follow the instructions on the screen.

Note

Before installing SteamTab *Duo* on your machine, please make sure that Excel is **not** running.

Once installation is complete you can access SteamTab *Duo* from Excel

Using SteamTab Duo



The following sections describe how to access and use the various features of SteamTab Duo.

Where is SteamTab Duo?


As an add-in package to your spreadsheet application, SteamTab Duo quietly becomes a part of your spreadsheet. You only see it when you need to use it. Just to make sure that SteamTab Duo is available,

A pop-up menu (which is also known as a drop-down menu) is a special menu item that displays a sublist of menu items when it is selected.

1. Start your spreadsheet application (if you have not already started it)
2. Click on the **Tools** menu. You should see a **SteamTab** pop-up menu somewhere near the bottom of the **Tools** menu.
3. Expand the **SteamTab** pop-up menu by clicking on it
4. The following figures show what you should see

Figure 1: Access to SteamTab Duo in Excel 2011 for Mac OS X

SteamTab Duo Menu

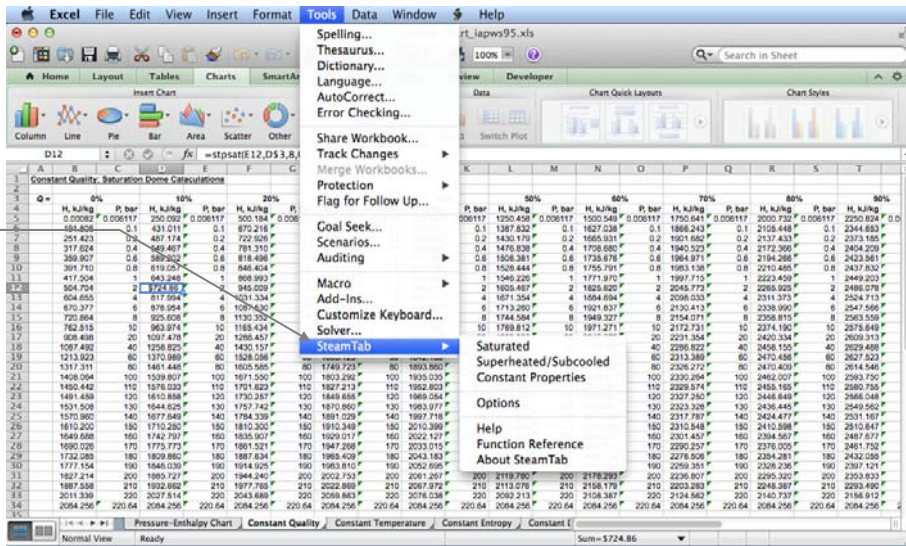

The **SteamTab Duo** pop-up menu contains the following menu items:

1. Saturated
Selecting this menu item brings up the saturated steam properties dialog box which helps you obtain saturated vapor or liquid steam properties, or two-phase steam properties.
2. Superheated/Subcooled
The menu item displays the dialog box for obtaining supercritical or subcooled steam properties. This dialog box is also used for constant property processes, such as, isenthalpic, isentropic, constant volume, etc. SteamTab *Duo* uses a highly efficient iterative search algorithm to quickly calculate all constant-process properties.
3. Constant Properties
Selecting this menu item brings up the constant properties dialog box which you can use to select the required constant steam property.
4. Options
This menu item allows you to select the units and other configuration options. You can also change the units and model formulation from any of the SteamTab *Duo* dialog-boxes.
5. Help
Provides you with easy access to user's guide.
6. Function Reference
Provides you with easy access to information about all of the functions defined by SteamTab. *Duo*.
7. About
Gives you information regarding the version of SteamTab *Duo* installed on your machine.

The following sections describe how to use the various capabilities of SteamTab *Duo*.

Setting Steam Property Options

The options dialog box helps you in setting up the units to base your property calculations. All of the SteamTab *Duo* dialog-boxes use the same options that you specify from the option dialog box.

You can access the SteamTab *Duo* options from either the **SteamTab Duo** pop-up menu or from any of the other SteamTab *Duo* dialog boxes.

Use the following steps to set the SteamTab *Duo* options (see Figure 2 for an illustration of the SteamTab *Duo* options dialog box):


If you are using the Worksheet functions directly in your spreadsheet, then you do not have to set the options. The options dialog is only used by the SteamTab *Duo* dialog boxes.

1. Select units
Select the **Metric** radio button if you want properties in Metric/SI units or select the **English** radio button for properties English units.
2. Select model formulation
Select the **Scientific (IAPWS-95)** radio button if you want to use the scientific formulation or select the **Industrial (IAPWS-97)** radio button if you want to use the industrial formulation.
3. Select comment option
Check the comments box if you want SteamTab *Duo* to place a comment regarding the property calculated and the units in the output cell.
4. Click OK
Click on the **OK** button to accept the changes. After you have clicked **OK**, all of the SteamTab *Duo* dialog-boxes will use the specified units options.

Note

If you typically work with only one set of options, you need to only specify them once. SteamTab *Duo* will remember the options even in subsequent sessions.

Figure 2: Steam Property Options Dialog

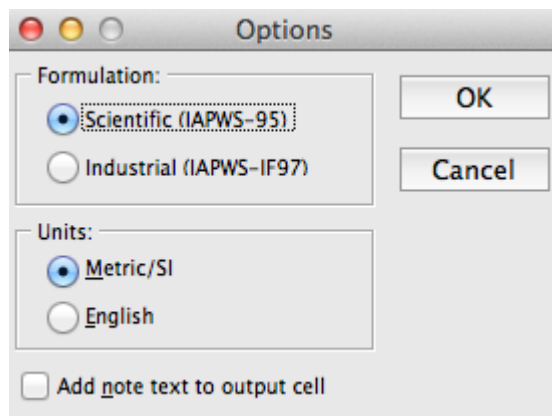

Using the Saturated Steam Properties Dialog Box

The saturated steam properties dialog box helps you in calculating saturated vapor or liquid steam properties at either specified temperature or specified pressure.

See the Chapter: Function Reference on page 25 for a description of SteamTab *Duo* functions

This dialog box automatically creates a call (with all the correct arguments) to the appropriate SteamTab *Duo* function based on the input parameters you supply.

Use the following steps to calculate a saturated steam property (see Figure 3 for an illustration of the saturated steam properties dialog box):

1. **Select Options**
Click on the **Options** button to bring up the options dialog-box from where you can select the units, as described in the previous section. If you previously selected the units, you can skip this step.
2. **Select independent variable**
Choose either **Temperature** or **Pressure** as the independent variable (the variable you wish to specify) by clicking on the appropriate radio button.
3. **Provide a value for the independent variable**
Type in a number for the independent variable in the Value edit box. Alternatively, you can type in or select a cell reference that contains a value for the specified independent variable.
4. **Select phase**
Select either **Vapor** or **Liquid** for saturated properties. For two-phase properties, select **Quality** and specify the steam quality as a value between 0 and 1.
5. **Select steam property required**
Using the drop-down combo-box, select the steam property you want. Use the mouse or the cursor keys to scroll through the list of available steam properties until you come to the one you desire.
6. **Provide an output cell reference**
Notice that SteamTab *Duo* has already filled this in with the currently selected cell reference. If this is not where you want the results to go, select or type in a different cell reference.
7. **Click OK**
SteamTab *Duo* will calculate the requested steam property and place it in the specified output cell as a formula.

Depending on your choice of units and independent variable, the value text will show you the units in which the value is required

Tip: Click on a cell where you want the results before opening the saturated dialog box. SteamTab *Duo* will automatically fill in the Output cell reference

You can determine the triple point and the critical point of steam by using the Constant steam properties dialog box. See page 14.


If you activate the saturated dialog box on a cell that already contains a saturated SteamTab *Duo* function, then SteamTab *Duo* will automatically initialize the dialog box with the correct values.

Note

The specified independent variable must be greater or equal to the triple point and less than or equal to the critical point of steam. If the specified independent variable is outside these bounds, the SteamTab *Duo* function returns the #VALUE! Error.

If you want a different saturated steam property, simply repeat the above steps. Alternatively, you could copy the cell containing the saturated steam property function and paste it in the location you want. You can then use the saturated dialog box to change the output steam property.

Figure 3: Saturated Steam Properties Dialog

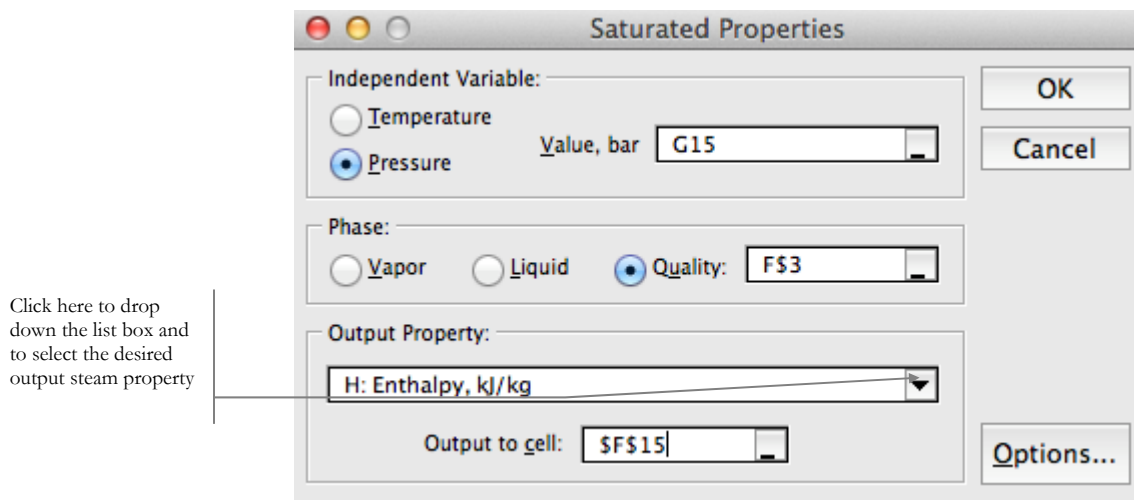

Using the Superheated/Subcooled Steam Properties Dialog Box

The superheated/subcooled dialog box helps you in calculating supercritical or subcooled steam properties. You also use this dialog box to model constant property processes, such as, isenthalpic, isentropic, constant volume, etc.

Using this dialog box automatically creates a call to the appropriate SteamTab *Duo* function based on the input parameters you supply.

The following steps show you how to use this dialog box (see Figure 4 for an illustration of the superheated/subcooled dialog box):

1. Select Options
Click on the **Options** button to bring up the options dialog-box from where you can select the units, as described in the previous section. If you previously selected the units, you can skip this step.
2. Select independent variables
Unlike saturated properties, calculating superheated or subcooled properties requires two independent variables. SteamTab *Duo* gives you 9 combinations of independent variables that you can choose from:
Temperature and any one of Pressure, Volume, Enthalpy, Entropy, or Internal energy

See the Chapter: Function Reference on page 25 for a description of SteamTab *Duo* functions

or

Pressure and any one of Volume, Enthalpy, Entropy, or Internal energy

- a. Select the first independent variable
Use the drop down list to select either Temperature or Pressure as the first independent variable
- b. Select the second independent variable
Use the drop down list box to select the second independent variable. The choices available will depend on what you chose as the first independent variable.

Depending on your choice of units and independent variables, the drop-down list box will show you the units in which the values are required


3. Provide values for the independent variables
Type a number in each of the edit boxes next to the independent variable selections. Alternatively, you can type in or select a cell reference that contains a value for the specified independent variables.
4. Select steam property required
Using the drop-down combo-box, select the steam property you want. Use the mouse or the cursor keys to scroll through the list of available steam properties until you come to the one you desire.
5. Provide an output cell reference
Notice that SteamTab *Duo* has already filled this in with the currently selected cell reference. If this is not where you want the results to go, select or type in a different cell reference.
6. Click OK
SteamTab *Duo* will calculate the requested steam property and place it in the specified output cell as a formula.

Tip: Click on a cell where you want the results before opening this dialog box. SteamTab *Duo* will automatically fill in the Output cell reference

If you activate the superheated /subcooled dialog box on a cell that already contains a SteamTab *Duo* function, then SteamTab *Duo* will automatically initialize the dialog box with the correct values.

If you want a different superheated or subcooled steam property, simply repeat the above steps. Alternatively, you could copy the cell containing the superheated/subcooled steam property function and paste it in the location you want. You can then use the superheated/subcooled dialog box to change the output steam property.

Figure 4: Superheated/Subcooled Dialog Box

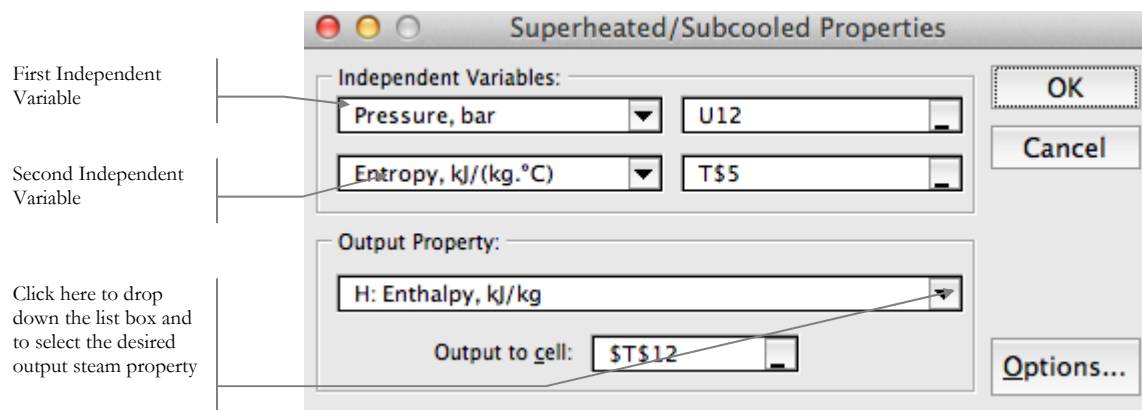

Using the Constant Steam Properties Dialog Box

The constant steam properties dialog box gives you access to fundamental steam properties, such as, molecular weight, critical properties, and triple point properties.

The following steps illustrate how to use this dialog box (see the figure below for an illustration of this dialog box):

1. Select Options
Click on the **Options** button to bring up the options dialog-box from where you can select the units, as described in the previous section. If you previously selected the units, you can skip this step.
2. Select constant steam property required
Using the drop-down combo-box, select the constant steam property you want. Use the mouse or the cursor keys to scroll through the list of available steam properties until you come to the one you desire.
1. Provide an output cell reference
Notice that SteamTab *Duo* has already filled this in with the currently selected cell reference. If this is not where you want the results to go, select or type in a different cell reference.
2. Click OK
SteamTab *Duo* will calculate the requested steam property and place it in the specified output cell as a formula.


Tip: Click on a cell where you want the results before opening this dialog box. SteamTab *Duo* will automatically fill in the Output cell reference

If you activate the constant property dialog box on a cell that already contains a constant property SteamTab *Duo* function, then SteamTab *Duo* will automatically initialize the dialog box with the correct values.

If you want a different constant steam property, simply repeat the above steps. Alternatively, you could copy the cell containing the constant steam property function and paste it in the location you want. You can then use the constant properties dialog box to change the output steam property.

Figure 5: Constant Property Dialog Box


Click here to drop down the list box and to select the desired output steam property

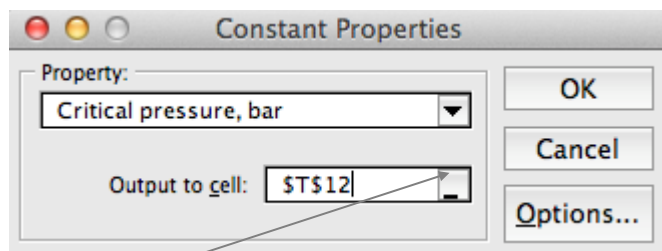

Using Excel's Function Wizard

If you know the SteamTab *Duo* function that you want to use, you can use Excel's formula builder to generate the function call. SteamTab *Duo* installs all of the functions in a category called ChemicalLogic SteamTab *Duo*, as shown below:

Figure 6: ChemicalLogic SteamTab *Duo* functions in Excel's Formula Builder

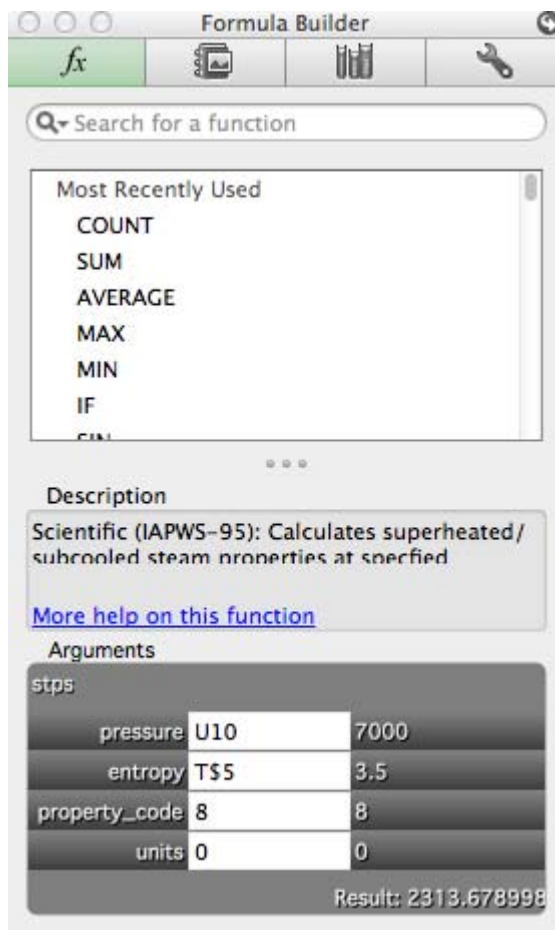


Using SteamTab *Duo* in Excel's Visual Basic for Applications (VBA)


You can also use the SteamTab *Duo* functions in your own macros or functions in Excel's VBA. But before you use the SteamTab *Duo* functions, you need to establish a reference to the add-in from the VBA editor.

To establish a reference to the SteamTab *Duo* add-in, start the VBA editor in Excel 2011 from the **Tools, Macro, Start Visual Basic Editor**. The Visual Basic editor comes up and from the **Tools** menu select **References** and place a check mark next to SteamTab *Duo* and select **OK**:

Figure 7: Excel VBA Reference to SteamTab *Duo*

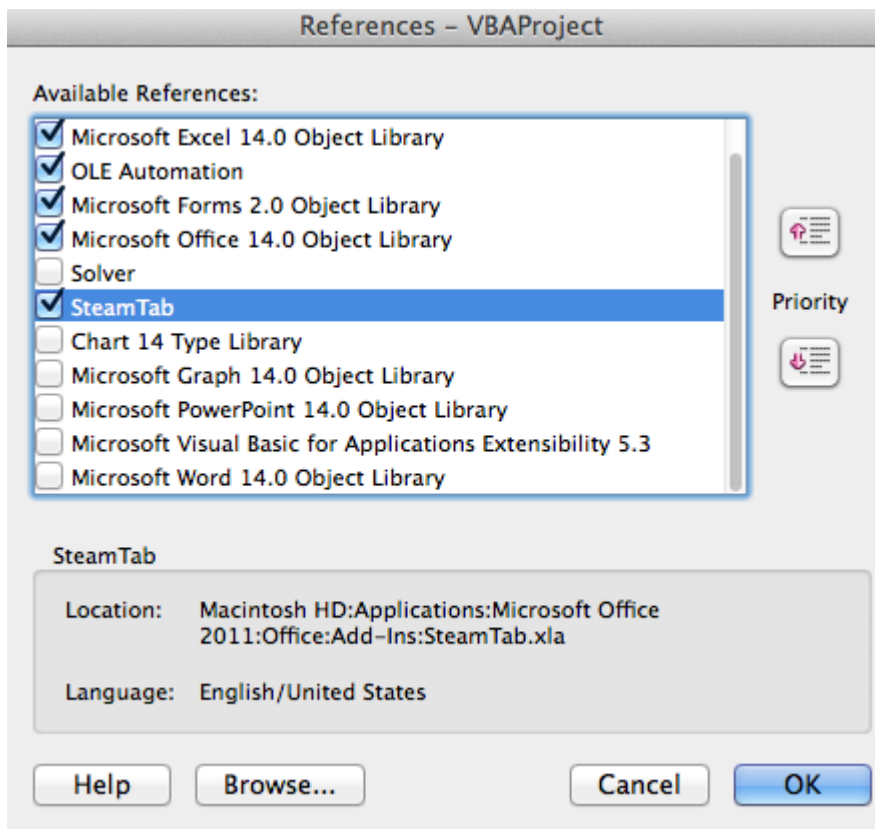

Once a reference to SteamTab *Duo* is established you can use the SteamTab *Duo* functions in VBA just as you would any other function, as shown below:

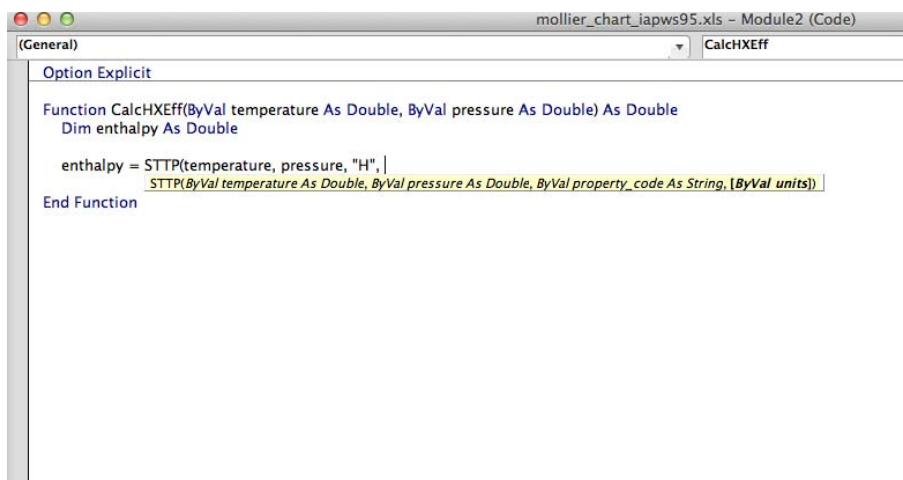

Tips and Tricks



Below is a list of tips that users like you have contributed to help the SteamTab *Duo* user community gain the best possible benefit of using SteamTab *Duo* in a spreadsheet-computing environment.

We encourage you to submit your tips and tricks to us for inclusion in future releases and upgrades. See page 6 for information on how to contact us.

Tips and tricks to help you become more productive (in no particular order):

- You may notice a slight delay the first time you use SteamTab *Duo*. This is normal, because the spreadsheet application loads the full SteamTab *Duo* package only when you first use it. This helps conserve memory.
- You do not have to remember the calling sequence of SteamTab *Duo* functions. Use the SteamTab *Duo* dialog boxes to generate the correct function with the right arguments.
- Click on the cell where you want the results before opening any of the SteamTab *Duo* dialog boxes. SteamTab *Duo* will automatically fill in the Output cell reference for you.

Joule, James Prescott

Joule (j|l, jou|), **James Prescott**

1818-1889

British physicist who established the mechanical theory of heat and discovered the first law of thermodynamics.

Tutorial

sty·mie

To thwart; stump: a problem in thermodynamics that stymied half the class.

– The American Heritage Dictionary of the English Language, Third Edition, 1996.

Introduction



The SteamTab *Duo* package you purchased contains several examples and templates that you can use in your work. The examples included in the SteamTab *Duo* package illustrate the following concepts:

- Steam Quality
- Constant-temperature process
- Constant-pressure process
- Constant-volume process
- Constant-entropy process
- Constant-internal energy process
- Irreversible adiabatic expansion
- Irreversible adiabatic compression
- Moisture content in air and dew point calculations
- Relative humidity
- Charting of steam properties

The following sections give you step-by-step instructions on how to solve two steam-related problems using the power of SteamTab *Duo*:

1. Calculating the enthalpy of vaporization, and
2. Constant property process

Example 1: Enthalpy of Vaporization

This rather simple example will illustrate how to use SteamTab *Duo* to obtain the enthalpy of vaporization of steam. Note that the enthalpy of vaporization is not one of the properties that is automatically calculated by SteamTab *Duo*. (**Note: SteamTab *Duo* V4.0 now includes this property**). However, it is nearly effortless, given the ease-of-use of SteamTab *Duo* in a spreadsheet-computing environment.

Problem Statement: Calculate the enthalpy of vaporization of water at temperatures of 225°C and 231.3°C.

Solution: The enthalpy of vaporization of water is defined as the difference between the enthalpies of the vapor and the liquid:

$$\Delta H_v = H_{\text{vapor}} - H_{\text{liquid}}$$

Therefore, all that we need to do is use SteamTab *Duo* to get the saturated vapor and liquid enthalpies at the specified temperature and take the difference of the two values to get the enthalpy of vaporization.

If you have access to printed steam tables, looking up the enthalpy of vaporization at a particular temperature is very easy, especially if you do not have to interpolate between the tabulated temperatures. For example, you could easily look up the enthalpy of vaporization at 225°C since most printed steam tables are tabulated at increments of 5°C and some even at 1°C increments. However, you would have to interpolate to get the enthalpy of vaporization at a temperature of 231.3°C. This process becomes tedious if you have several such points to compute or if you need to interpolate several different properties.

Using the power of SteamTab *Duo* and the ease-of-use of spreadsheets, this process becomes nearly effortless. The solution to this problem is shown in Figure 8 below.

Figure 8: Tutorial Example 1

	A	B	C	D	E
1	Specified Temperature	C	225	231.3	
2	Vapor Enthalpy	kJ/kg	2802.148	2803.015	
3	Liquid Enthalpy	kJ/kg	966.796	996.3022	
4	Enthalpy of Vaporization	kJ/kg	1835.352	1806.713	
5					
6					

The first step in solving a problem in a spreadsheet is to layout the problem definition. As shown in the figure above, the known and computed variable names are documented in Column A. Column B contains the units in which the properties are computed. Column C contains the specified and computed properties at the first temperature and column D contains the same at the other temperature.

Using SteamTab *Duo*, obtain the saturated vapor and liquid enthalpies at 225°C, shown in cells C2 and C3. In cell C4 take the difference between C2 and C3 to get the enthalpy of vaporization at 225°C. Then simply copy cells C1 through C4 and paste it in cells D1 through D4. Change the temperature in cell D1 to 231.3 and instantly you have the solution to the second part of the problem.

Step-by-step
Instructions:

The step-by-step instructions for this example are given below.

1. Layout the problem definition

It is good practice to first lay out the problem definition. Follow these steps:

 - a. In cell A1 type **Specified Temperature**
 - b. In cell B1 type **C** (for the units)
 - c. In cell C1 type **225**
 - d. In cell A2 type **Vapor Enthalpy**
 - e. In cell B2 type **kJ/kg** (the units in which SteamTab *Duo* is to return the enthalpy)
 - f. In cell A3 type **Liquid Enthalpy**
 - g. In cell A4 type **Enthalpy of Vaporization**
 - h. Copy the contents of cell B2 to cell B3 and B4
 - i. Expand the width of column A so that you can see all of its contents
2. Set the steam property options

Since we will be using the SteamTab *Duo* dialogs to obtain properties, we will first the steam property options to use the metric/SI units.

See Table 1 on page 19 for a listing of steam properties and their Metric/SI and English units

- a. From the **SteamTab Duo** pop-up menu select **Options**
 - b. Click on the **Metric/SI** radio buttons
 - c. Click **OK**
2. Use **SteamTab Duo** to get the vapor enthalpy
 In this step you will use **SteamTab Duo** to get the vapor enthalpy at a temperature of 225°C.
 - a. Click on cell **C2** to make it the active cell
 - b. From the **Tools** menu pop-up the **SteamTab Duo** menu and select **Saturated**
 - c. In the saturated steam properties dialog box, select **Temperature** as the independent variable. Type **C1** in the value edit box. Select **Vapor** as the phase. Use the drop-down list box and locate **Enthalpy** as the required steam property. Note that the Output Cell is already filled in with **C2**. Click **OK**.
 - d. The cell **C2** should now contain the value **2802.148**. Notice that cell **C2** actually contains a formula which looks like the following:
 For Excel users: **=STTSAT(C2,1, 8,0)**
3. Use **SteamTab Duo** to get the liquid enthalpy
 Use the following steps to get the enthalpy of liquid at 225°C.
 - a. Copy the contents of cell **C2** to cell **C3**
 - b. Make sure that cell **C3** is the active cell
 - c. From the **Tools** menu pop-up the **SteamTab Duo** menu and select **Saturated**
 - d. Notice how **SteamTab Duo** fills-in all of the right values in the dialog-box. Select **Liquid** as the phase and click **OK**.
 - e. The cell **C3** should contain the value **966.796**, which is the specific enthalpy of liquid at 225°C.
4. Calculate the enthalpy of vaporization
 In cell **C4** type the formula: **C2-C3** and press **Enter**. You now have the answer: **1835.352** kJ/kg.
5. Extend the result to 231.3°C
 Copy the cells **C1** through **C4** to cells **D1** through **D4**. Then change the value in **D1** to **231.3**. The numbers in **D2**, **D3**, and **D4** change automatically to their proper values.

Excel users should first check on the cell check-box next to the value edit box before typing in C1.

You may notice a slight delay the first time you use **SteamTab Duo**. This is normal, because the spreadsheet application loads the full **SteamTab Duo** package only when you first use it. This helps conserve memory.

If you have been working along, Figure 8 on page 21 shows what your spreadsheet should look like.

Example 2: Constant Property Process

Problem Statement: A steam line is connected to an evacuated well-insulated tank via a valve. The line pressure is 120 psia and temperature is 800°F. If the valve is opened and the steam is allowed to expand into the tank, what is the final temperature in the tank? Assume that the steam line is connected to an inexhaustible source of steam at the other end.

Solution: Based on the laws of thermodynamics, since no heat is added or removed from the system the only work done by the steam in expanding into the tank is to change the internal energy of the steam in the tank. In other words, the final internal energy in the tank must equal the initial enthalpy of steam in the line. Also, the final pressure in the tank must be equal to the pressure of steam in the line:

$$U_{\text{tank}} = H_{\text{line}}$$

$$P_{\text{tank}} = P_{\text{line}}$$

where U is internal energy and H is the enthalpy. The solution to this problem is shown in Figure 9.

Solution Strategy: The temperature and pressure in the line are specified to be 800°F and 120 psia. Since the line temperature is greater than the critical temperature of steam (705.16°F) the steam is not saturated. Therefore, we use the superheated/subcooled SteamTab *Duo* functions to compute the thermodynamic properties of the steam in the line.

The final conditions in the tank are thus determined: the final pressure in the tank is 120 psia and the internal energy is equal to the enthalpy of steam in the line. Given these two variables, the rest of the thermodynamic properties of steam can easily be computed. SteamTab *Duo* contains 9 combinations of independent variables you can specify, and one of them is pressure (P) and internal energy (U).

Figure 9: Tutorial Example 2

This example is included in your SteamTab *Duo* package.

	A	B	C	D	E
1			Line	Tank	
2			Initial (1)	Final (2)	
3	Pressure (P)	psia	120.00	120.00	$P_2 = P_1$
4	Temperature (T)	°F	800.00	1137.92	Answer
5	Enthalpy (H)	Btu/lb	1428.97	1604.45	
6	Internal Energy (U)	Btu/lb	1291.41	1428.97	$U_2 = H_1$
7					

Using a strategy similar to the one in tutorial example 1, we first design and layout the problem definition. The known and computed variable names are documented in Column A. Column B contains the units in which the properties are computed. Column C contains the line conditions and column D the tank conditions.

Cells C3 and C4 contain the specified line pressure and temperature, respectively. Cell D3 simply refers to the value in cell C3, since the final pressure is the same as the line pressure. Using SteamTab *Duo*'s superheated/subcooled dialog box and using temperature and pressure as the independent variables, we compute the enthalpy and internal energy shown in cells C5 and C6. We then refer the contents of cell D6 to the value in cell C5, since the final internal energy is the same as the initial enthalpy. Again using SteamTab *Duo*'s superheated/subcooled dialog box with pressure and internal energy as the independent variables, we obtain the final thermodynamic properties including the final temperature of 1137.92°F.

Step-by-step
Instructions:

The step-by-step instructions are left as an exercise for the user. You should follow the general solution strategy described above and re-create this example on your own. You can use the example included in your SteamTab *Duo* package as a guide.

Nernst, Walther Hermann

Nernst (*nĕrnst*), Walther Hermann

1864-1941

German physicist and chemist. He won a 1920 Nobel Prize for his work in thermochemistry, particularly his proposal of the third law of thermodynamics (1906)

Function Reference

My spelling is Wobbly. It's good spelling but it Wobbles, and the letters get in the wrong places.
– A. A. Milne (1882–1958)
Winnie-the-Pooh, ch. 6 (1926).

Overview



The SteamTab *Duo* add-in package is based on a set of 19 core functions (for both the Scientific formulations and the Industrial formulations) that together calculate over 30 thermodynamic and transport properties of steam. You can use these functions directly in your spreadsheet or you can use SteamTab *Duo's* easy-to-use dialog boxes to automatically generate the appropriate function call with the correct arguments.

SteamTab *Duo* functions are divided into three categories:

1. Functions for saturated vapor, liquid or two-phase properties (2 functions)
These two functions calculate saturated vapor, liquid and two-phase properties from the triple point up to the critical point. You can choose either temperature or pressure as the independent variable.
2. Functions for superheated vapor or subcooled liquid properties (9 functions)
The functions in this category provide you with a rich set of tools for conducting several constant-property processes. Depending on the choice of independent variables, you can model isentropic, isenthalpic, constant volume, or constant internal energy processes.
3. Functions for constant steam properties (8 functions)
The 8 functions in this category give you access to fundamental steam properties that are not functions of temperature or pressure, such as, molecular weight, critical properties, and triple point properties.

SteamTab *Duo* functions based on the scientific formulation (IAPWS-95) are shown in Table 2 and those based on the industrial formulation (IAPWS-97) are shown in Table 3.

Note

All SteamTab *Duo* functions based on the scientific formulation (IAPWS-95) begin with the prefix **ST**, and all of the SteamTab *Duo* functions based on the industrial formulation (IAPWS-97) begin with the prefix **AST**.

SteamTab *Duo* functions based on the old scientific formulation (NBS/NRC-84) begin with the prefix **OST**, and all of the SteamTab *Duo* functions based on the old industrial formulation (IFC-67) begin with the prefix **OAST**

Table 2: Overview of SteamTab *Duo* Functions: Scientific Formulation (IAPWS-95)

Function	Calculates	Calling Sequence
Saturated vapor, liquid or two-phase functions		
STPSAT	at specified pressure	STPSAT(<i>pressure, quality, code, units</i>)
STTSAT	at specified temperature	STTSAT(<i>temperature, quality, code, units</i>)
Superheated or subcooled functions		
STTP	at specified temperature and pressure (<i>T-P</i>)	STTP(<i>temperature, pressure, code, units</i>)
STTV	at specified temperature and volume (<i>T-V</i>)	STTV(<i>temperature, volume, code, units</i>)
STTH	at specified temperature and enthalpy (<i>T-H</i>)	STTH(<i>temperature, enthalpy, code, units</i>)
STTS	at specified temperature and entropy (<i>T-S</i>)	STTS(<i>temperature, entropy, code, units</i>)
STTU	at specified temperature and internal energy (<i>T-U</i>)	STTU(<i>temperature, internal_energy, code, units</i>)
STPV	at specified pressure and volume (<i>P-V</i>)	STPV(<i>pressure, volume, code, units</i>)
STPH	at specified pressure and enthalpy (<i>P-H</i>)	STPH(<i>pressure, enthalpy, code, units</i>)
STPS	at specified pressure and entropy (<i>P-S</i>)	STPS(<i>pressure, entropy, code, units</i>)
STPU	at specified pressure and internal energy (<i>P-U</i>)	STPU(<i>pressure, internal_energy, code, units</i>)
Constant properties functions		
STMW	Molecular weight	STMW(<i>units</i>)
STTC	Critical temperature	STTC(<i>units</i>)
STPC	Critical pressure	STPC(<i>units</i>)
STVC	Critical specific volume	STVC(<i>units</i>)
STRC	Critical specific density	STRC(<i>units</i>)
STZC	Critical compressibility factor	STZC(<i>units</i>)
STTPT	Triple point temperature	STTPT(<i>units</i>)
STTPP	Triple point pressure	STTPP(<i>units</i>)

Table 3: Overview of SteamTab *Duo* Functions: Industrial Formulation (IAPWS-97)

Function	Calculates	Calling Sequence
Saturated vapor, liquid or two-phase functions		
ASTPSAT	at specified pressure	ASTPSAT(pressure, quality, code, <i>units</i>)
ASTTSAT	at specified temperature	ASTTSAT(temperature, quality, code, <i>units</i>)
Superheated or subcooled functions		
ASTTP	at specified temperature and pressure (<i>T-P</i>)	ASTTP(temperature, pressure, code, <i>units</i>)
ASTTV	at specified temperature and volume (<i>T-V</i>)	ASTTV(temperature, volume, code, <i>units</i>)
ASTTH	at specified temperature and enthalpy (<i>T-H</i>)	ASTTH(temperature, enthalpy, code, <i>units</i>)
ASTTS	at specified temperature and entropy (<i>T-S</i>)	ASTTS(temperature, entropy, code, <i>units</i>)
ASTTU	at specified temperature and internal energy (<i>T-U</i>)	ASTTU(temperature, internal_energy, code, <i>units</i>)
ASTPV	at specified pressure and volume (<i>P-V</i>)	ASTPV(pressure, volume, code, <i>units</i>)
ASTPH	at specified pressure and enthalpy (<i>P-H</i>)	ASTPH(pressure, enthalpy, code, <i>units</i>)
ASTPS	at specified pressure and entropy (<i>P-S</i>)	ASTPS(pressure, entropy, code, <i>units</i>)
ASTPU	at specified pressure and internal energy (<i>P-U</i>)	ASTPU(pressure, internal_energy, code, <i>units</i>)
Constant properties functions		
ASTMW	Molecular weight	ASTMW(<i>units</i>)
ASTTC	Critical temperature	ASTTC(<i>units</i>)
ASTPC	Critical pressure	ASTPC(<i>units</i>)
ASTVC	Critical specific volume	ASTVC(<i>units</i>)
ASTRC	Critical specific density	ASTRC(<i>units</i>)
ASTZC	Critical compressibility factor	ASTZC(<i>units</i>)
ASTTPT	Triple point temperature	ASTTPT(<i>units</i>)
ASTTPP	Triple point pressure	ASTTPP(<i>units</i>)

Note

In Microsoft Excel *units* is an optional argument. You need not specify *units*, in which case all requested properties are returned in Metric/SI units, that is, the default value is 0. For steam properties in English units, set *units* to 1

The argument **quality** is used to specify the saturated steam quality (vapor fraction) or to specify the two-phase steam quality. Use a value of 1 for saturated vapor, 0 for saturated liquid and between 0 and 1 for two-phase. The SteamTab *Duo* functions also return **quality** as a calculated property. If the quality cannot be determined, then a value of -1 is returned. If the phase is superheated vapor, then a **quality** of -2 is returned, and if the phase is subcooled liquid a **quality** of -3 is returned.

The argument `code`, is an integer argument that specifies the type of steam property requested. Valid values of `code` and the units in which they are returned are shown in the table below.

Table 4: Property Codes for Thermodynamic and Transport Properties of Steam

Code	Steam Property	Metric/SI Units	English Units
0	T Temperature, T	°C	°F
1	P Pressure, P	bar	psia
2	V Volume, V	m ³ /kg	ft ³ /lb
3	D Density, ρ	kg/m ³	lb/ft ³
4	Z Compressibility factor, Z	dimensionless	dimensionless
5	A Helmholtz free energy, A	kJ/kg	Btu/lb
6	S Entropy, S	kJ/(kg·°C)	Btu/(lb·°F)
7	U Internal energy, U	kJ/kg	Btu/lb
8	H Enthalpy, H	kJ/kg	Btu/lb
9	G Gibbs free energy, G	kJ/kg	Btu/lb
10	CV Heat capacity at constant volume, C_v	kJ/(kg·°C)	Btu/(lb·°F)
11	CP Heat capacity at constant pressure, C_p	kJ/(kg·°C)	Btu/(lb·°F)
12	W Speed of sound, v	m/s	ft/s
13	ALPHA Coefficient of thermal expansion, $\alpha = \rho(\partial V/\partial T)_P$	1/°C	1/°F
14	KAPPA Isothermal compressibility, $\kappa = -\rho(\partial V/\partial P)_T$	1/bar	1/psia
15	DPDT dpdt, $(\partial P/\partial T)_V$	bar/°C	psia/°F
16	DVDT dvdt, $(\partial V/\partial T)_P$	m ³ /(kg·°C)	ft ³ /(lb·°F)
17	DVDP dvdp, $(\partial V/\partial P)_T$	m ³ /(kg·bar)	ft ³ /(lb·psi)
18	MU Viscosity (dynamic), μ	μPa·s	lb/(ft·hr)
19	KT Thermal conductivity, K	W/(m·°C)	Btu/(hr·ft·°F)
20	ST Surface tension, σ	N/m	N/m
21	PR Prandtl number, N_{Pr}	dimensionless	dimensionless
22	DC Static dielectric constant	dimensionless	dimensionless
23	IJT Isothermal Joule-Thomson coefficient	kJ/(kg·bar)	Btu/(lb·psia)
24	JT Joule-Thomson coefficient	°C/bar	°F/psia
25	Q Quality (vapor mass fraction)	dimensionless	dimensionless
26	GAMMA Isentropic exponent, $\gamma = -V/P(\partial P/\partial V)_S$	dimensionless	dimensionless
27	HV Latent heat of vaporization	kJ/kg	Btu/lb

Note

By definition, the thermodynamic Reference State of steam is the liquid at the triple point (0.01°C), at which the internal energy and entropy are set to zero.

Functions for Saturated Steam Properties



The functions for saturated steam properties calculate vapor, liquid or two-phase properties at either specified pressure or specified temperature. The applicable range of these functions is from the triple point up to the critical point.

Depending on your choice of model formulation and independent variable, the two functions you can choose are:

Independent Variable	Scientific Formulation (IAPWS-95)	Industrial Formulation (IAPWS-97)
Pressure	STPSAT	ASTPSAT
Temperature	STTSAT	ASTTSAT

These functions are described in detail below.

STPSAT, ASTPSAT

Calculates the saturated vapor or liquid property at the specified pressure and quality.

Syntax: Scientific Formulation (IAPWS-95)

STPSAT(pressure, quality, code, units)

Syntax: Industrial Formulation (IAPWS-97)

ASTPSAT(pressure, quality, code, units)

Arguments

pressure	is the pressure at which the saturated steam property is required. See the Remarks section for acceptable pressure units.
quality	is 1 for vapor phase properties, 0 for liquid phase properties and between 0 and 1 for two-phase.
code	is an integer property code that specifies the type of property required. (page 25) for a listing of valid property codes.
units	is an integer argument (optional in Excel). For Metric/SI units, specify a value of 0 (or leave empty in Excel). For English units, specify a value of 1.

Remarks

- The pressure must be greater than or equal to the Triple Point Pressure and less than or equal to the Critical Pressure.
- If any of the arguments are invalid or if the arguments are outside the acceptable bounds, the function returns the following error codes:
 - In Excel versions: #VALUE! error
 - In Lotus versions: ERR error

Examples

1. STPSAT(14.7, 1, 0, 1) returns 212.02 which is the boiling point of water (in °F) at a pressure of 14.7 psia.
2. STPSAT(14.7, 1, 8, 1) – STPSAT(14.7, 0, 8, 1) returns 970.18 which is the enthalpy of vaporization (in Btu/lb) of water at a pressure of 14.7 psia.
3. STPSAT(100, 0, 11) returns 6.124 which is the specific heat capacity at constant pressure (in kJ/(kg.°C)) at a pressure of 100 bar.

STTSAT, ASTTSAT

Calculates the saturated vapor, liquid or two-phase property at the specified temperature.

Syntax: Scientific Formulation (IAPWS-95)

STTSAT(temperature, quality, code, units)

Syntax: Industrial Formulation (IAPWS-97)

STTSAT(temperature, quality, code, units)

Arguments

temperature	is the temperature at which the saturated steam property is required. See the Remarks section for acceptable temperature units.
quality	is 1 for vapor phase properties, 0 for liquid phase properties and between 0 and 1 for two-phase.
code	is an integer property code that specifies the type of property required. See (page 25) for a listing of valid property codes and their meaning.
units	is an integer argument (optional in Excel). For Metric/SI units, specify a value of 0 (or leave empty in Excel). For English units, specify a value of 1.

Remarks

- The specified temperature must be greater than or equal to the Triple Point Temperature and less than or equal to the Critical Temperature.
- If any of the arguments are invalid or if the arguments are outside the acceptable bounds, the function returns the following error codes:
 - In Excel versions: #VALUE! error
 - In Lotus versions: ERR error

Examples

1. STTSAT(212,1,1,1) returns 14.696 which is the vapor pressure (in psia) of water at a temperature of 212°F.
2. STTSAT(212 , 1 , 8 , 1) - STTSAT(212 , 0 , 8 , 1) returns 970.19 which is the enthalpy of vaporization (in Btu/lb) of water at a temperature of 212°F.
3. STTSAT(300 , 0 , 11) returns 5.75 which is the specific heat capacity of liquid at constant pressure (in kJ/(kg.°C)) at a temperature of 300°C.

Functions for Superheated or Subcooled Steam Properties



The functions in this category calculate the superheated vapor or subcooled liquid property at any two specified independent variables. These functions have a wide range of applicability. Depending on the model formulation, the properties returned by these functions are acceptable within the following ranges:

Variable	Range for Scientific Formulation	Range for Industrial Formulation
Pressure (P , bar)	$0 \leq P \leq 100,000$	$0 \leq P \leq 1,000$
Temperature (T , K)	$190 \leq T \leq 5000$	$273.16 \leq T \leq 1073.15$ (for $P \leq 1,000$) $273.15 \leq T \leq 2273.15$ (for $P \leq 100$)

The superheated/subcooled functions require two independent variables as input. Use the following table as a guide to select the appropriate function:

Specified Independent Variable		Use Function	
First Variable	Second Variable	Scientific	Industrial
Temperature, T	Pressure, P	STTP	ASTTP
Temperature, T	Volume, V	STTV	ASTTV
Temperature, T	Enthalpy, H	STTH	ASTTH
Temperature, T	Entropy, S	STTS	ASTTS
Temperature, T	Internal Energy, U	STTU	ASTTU
Pressure, P	Volume, V	STPV	ASTPV
Pressure, P	Enthalpy, H	STPH	ASTPH
Pressure, P	Entropy, S	STPS	ASTPS
Pressure, P	Internal Energy, U	STPU	ASTPU

All of these functions have a similar syntax and arguments as described below.

General Description

General Syntax: Scientific Formulation (IAPWS-95)

STXX(first_variable, second_variable, code, units)

General Syntax: Industrial Formulation (IAPWS-97)

ASTXX(first_variable, second_variable, code, units)

Replace STXX or ASTXX with the appropriate function name.

General Arguments

first_variable is the first independent variable.

second_variable is the second independent variable .

code is an integer property code that specifies the type of property required. See (page 25) for a listing of valid property codes and their meaning.

units is an integer argument (optional in Excel). For Metric/SI units, specify a value of 0 (or leave empty in Excel). For English units, specify a value of 1.

General Remarks

- If any of the arguments are invalid or if the arguments are outside the acceptable bounds, the function returns the following error codes:
 - In Excel versions: #VALUE! error
 - In Lotus versions: ERR error
- Some of these functions solve for the pressure iteratively. Therefore, it is possible that the function may fail to converge, in which case the function returns the above error codes.

The individual functions are documented below.

STTP, ASTTP

Calculates superheated vapor or subcooled liquid property at the specified temperature and pressure.

Syntax: Scientific Formulation (IAPWS-95)

STTP(temperature, pressure, code, units)

Syntax: Industrial Formulation (IAPWS-97)

ASTTP(temperature, pressure, code, units)

Remarks

- The specified temperature unit must be in °C if *units* is 0; and must be in °F if *units* is 1.
- The specified pressure unit must be in bar if *units* is 0; and must be in psia if *units* is 1.

Examples

1. STTP (500 , 200 , 12 , 1) returns 1810 . 1 which is the speed of sound in ft/s at a temperature of 500°F and a pressure of 200 psia.
2. STTP (5000 , 1200 , 21 , 1) return 0 . 779 which is the Prandtl number at a temperature of 5000°F and a pressure of 1200 psia.

STTV, ASTTV

Calculates superheated vapor or subcooled liquid property at the specified temperature and volume.

Syntax: Scientific Formulation (IAPWS-95)

STTV(temperature, volume, code, units)

Syntax: Industrial Formulation (IAPWS-97)
 ASTTV(temperature, volume, code, *units*)

Remarks

- The specified temperature unit must be in °C if *units* is 0; and must be in °F if *units* is 1.
- The specified volume unit must be in m³/kg if *units* is 0; and must be in ft³/lb if *units* is 1.

STTH, ASTTH

Calculates superheated vapor or subcooled liquid property at the specified temperature and enthalpy.

Syntax: Scientific Formulation (IAPWS-95)
 STTH(temperature, enthalpy, code, *units*)

Syntax: Industrial Formulation (IAPWS-97)
 ASTTH(temperature, enthalpy, code, *units*)

Remarks

- The specified temperature unit must be in °C if *units* is 0; and must be in °F if *units* is 1.
- The specified enthalpy unit must be in kJ/kg if *units* is 0; and must be in Btu/lb if *units* is 1.

STTS, ASTTS

Calculates superheated vapor or subcooled liquid property at the specified temperature and entropy.

Syntax: Scientific Formulation (IAPWS-95)
 STTS(temperature, entropy, code, *units*)

Syntax: Industrial Formulation (IAPWS-97)
 ASTTS(temperature, entropy, code, *units*)

Remarks

- The specified temperature unit must be in °C if *units* is 0; and must be in °F if *units* is 1.
- The specified entropy unit must be in kJ/(kg·°C) if *units* is 0; and must be in Btu/(lb·°F) if *units* is 1.

STTU, ASTTU

Calculates superheated vapor or subcooled liquid property at the specified temperature and internal energy.

Syntax: Scientific Formulation (IAPWS-95)

STTU(temperature, internal_energy, code, *units*)

Syntax: Industrial Formulation (IAPWS-97)

ASTTU(temperature, internal_energy, code, *units*)

Remarks

- The specified temperature unit must be in °C if *units* is 0; and must be in °F if *units* is 1.
- The specified internal energy unit must be in kJ/kg if *units* is 0; and must be in Btu/lb if *units* is 1.

STPV, ASTPV

Calculates superheated vapor or subcooled liquid property at the specified pressure and volume.

Syntax: Scientific Formulation (IAPWS-95)

STPV(pressure, volume, code, *units*)

Syntax: Industrial Formulation (IAPWS-97)

ASTPV(pressure, volume, code, *units*)

Remarks

- The specified pressure unit must be in bar if *units* is 0; and must be in psia if *units* is 1.
- The specified volume unit must be in m³/kg if *units* is 0; and must be in ft³/lb if *units* is 1.

STPH, ASTPH

Calculates superheated vapor or subcooled liquid steam property at the specified pressure and enthalpy.

Syntax: Scientific Formulation (IAPWS-95)

STPH(pressure, enthalpy, code, *units*)

Syntax: Industrial Formulation (IAPWS-97)

ASTPH(pressure, enthalpy, code, *units*)

Remarks

- The specified pressure unit must be in bar if *units* is 0; and must be in psia if *units* is 1.
- The specified enthalpy unit must be in kJ/kg if *units* is 0; and must be in Btu/lb if *units* is 1.

STPS, ASTPS

Calculates superheated vapor or subcooled liquid property at the specified pressure and entropy.

Syntax: Scientific Formulation (IAPWS-95)

STPS(pressure, entropy, code, *units*)

Syntax: Industrial Formulation (IAPWS-97)

ASTPS(pressure, entropy, code, *units*)

Remarks

- The specified pressure unit must be in bar if *units* is 0; and must be in psia if *units* is 1.
- The specified entropy unit must be in kJ/(kg·°C) if *units* is 0; and must be in Btu/(lb·°F) if *units* is 1.

STPU, ASTPU

Calculates superheated vapor or subcooled liquid property at the specified pressure and internal energy.

Syntax: Scientific Formulation (IAPWS-95)

STPU(pressure, internal_energy, code, *units*)

Syntax: Industrial Formulation (IAPWS-97)

ASTPU(pressure, internal_energy, code, *units*)

Remarks

- The specified pressure unit must be in bar if *units* is 0; and must be in psia if *units* is 1.
- The specified internal energy unit must be in kJ/kg if *units* is 0; and must be in Btu/lb if *units* is 1.

Functions for Constant Steam Properties



The functions in this category return constant steam properties, such as, the molecular weight, critical properties, and triple point properties.

The constant steam property functions are:

Scientific Formulation	Industrial Formulation	Calculates	Metric/SI Units	English Units
STMW	ASTMW	Molecular weight	kg/kmol	lb/lbmol
STTC	ASTTC	Critical temperature	°C	°F
STPC	ASTPC	Critical pressure	bar	psia
STVC	ASTVC	Critical specific volume	m ³ /kg	ft ³ /lb
STRC	ASTRC	Critical specific density	kg/m ³	lb/ft ³
STZC	ASTZC	Critical compressibility factor	dimensionless	dimensionless
STTPT	ASTTPT	Triple point temperature	°C	°F
STTPP	ASTTPP	Triple point pressure	bar	psia

All of the functions in this category take an integer argument: *units* (optional in Excel) which is 0 or Metric units. For constant properties in English units set this argument to 1.

Note (Excel Only)

If you want to use the default argument you need not specify any value. In this case, Excel users must use the “empty” parenthesis, for example, =STTC().

Examples

1. STMW() returns 18.0152 which is the molecular weight of steam in kg/kmol
2. STPC(1) returns 3198.8 which is the critical pressure of steam in psia
3. STTPT(0) returns 0.01 which is the triple point temperature of steam in °C

en·tro·py

en·tro·py *noun*

plural en·tro·pies

1. *Symbol S.* For a closed thermodynamic system, a quantitative measure of the amount of thermal energy not available to do work.
2. A measure of the disorder or randomness in a closed system.
3. A measure of the number of bits necessary to transmit a message as a function of the probability that the message will consist of a specific set of symbols.
4. A hypothetical tendency for all matter and energy in the universe to evolve toward a state of inert uniformity.
5. Inevitable and steady deterioration of a system or society.